


Temperature Fuse Resistors
Power , Moisture - proof, Fuse


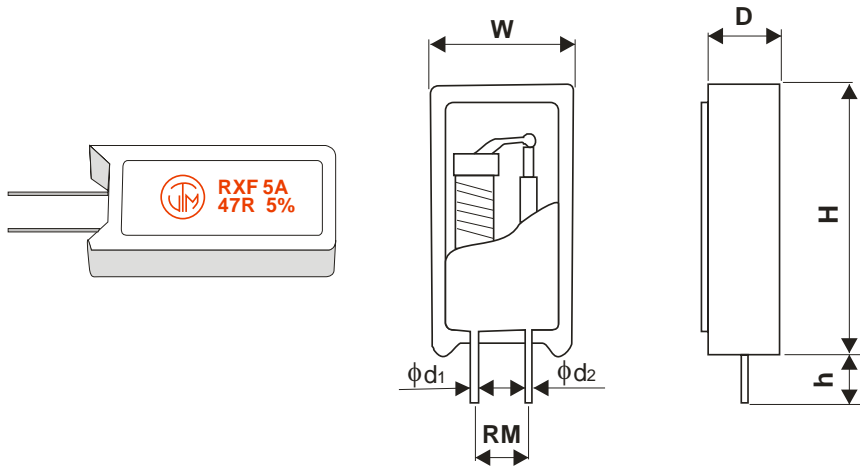


Dimensions in mm:

Type	Power rating [W] P ₂₅	W ±1	D ±1	H ±1,5	RM +2 /-1	h	d ₁ ±0,1	d ₂ ±0,1
RXF5	5	13	9	25	5	4,5	0,8	2A: 0,6 10A: 1,0
RXF7	7	13	9	38	5	4,5	0,8	
RXF10	10	13	12	35	7,5	4,5	0,8	

TEMPERATURE FUSE RESISTOR				RATED POWER AT 25°C (W)			Resistance Range	Tolerance
Mark	Fusing Temperature (°C)	Standard Current (A)	Standard Voltage (V)	5	7	10		
A	109 +3 / -1	10	250	1,2	1,4	2,0	1R ... 120R *	5% ; 10%
B	129 ±4	10	250	1,6	2,0	2,5		
C	152 ±4	10	250	1,6	2,0	2,5		
D	188 ±3	10	250	2,0	2,4	3,5		
E	226 +3 / -2	10	250	2,0	2,4	3,5		
G	110 ±4	2	250	1,2	1,4			
H	126 ±4	2	250	1,4	1,6			
N	130 ±4	2	250	1,6	2,0			
M	145 ±4	2	250	2,1	2,4			

* higher values on request

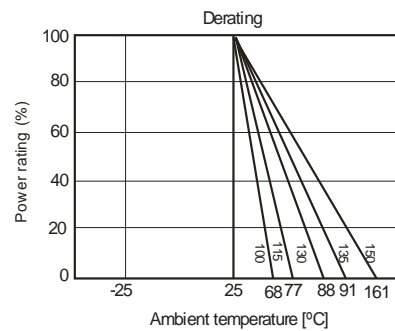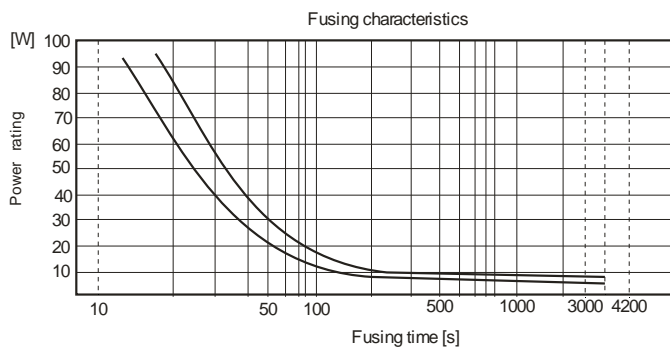

Ordering example: RXF5 A 5 B 10R
 Type/Dimens. Mark of fusing protector Tolerance Pack-code R- value