

## Technical Data Sheet 0805 Package Chip LED (0.8mm Height)

## 17-215/GHC-CS1T2/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version

### **Descriptions**

- The 17-215 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

#### **Device Selection Guide**

Don't No	Chip	Emitted Color	Resin Color	
Part No.	Material	Emitted Color		
17-215/GHC-CS1T2/3T	InGaN	Brilliant Green	Water Clear	



Everlight Electronics Co., Ltd. Device No.: DSE-0001700

http://www.everlight.com


Prepared date:9-June-2009


Rev.1


Page: 1 of 10

Prepared by: Niu Yanling


## **Package Outline Dimensions**








For reflow soldering (propose)





**Note:** The tolerances unless mentioned are  $\pm 0.1$ mm, Unit = mm



# **EVERLIGHT ELECTRONICS CO., LTD.**

## 17-215/GHC-CS1T2/3T

## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	$V_R$	5	V	
Forward Current	<b>I</b> F	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA	
Power Dissipation	Pd	95	mW	
Electrostatic Discharge(HBM)	ESD	150	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec.		

## **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	180		450	mcd	
Viewing Angle	2 \theta 1/2		130		deg	
Peak Wavelength	λр		518		nm	
Dominant Wavelength	λd	517.5		529.5	nm	$I_F = 20 \text{mA}$
Spectrum Radiation Bandwidth	Δλ		35		nm	
Forward Voltage	VF	2.7	3.3	3.7	V	
Reverse Current	Ir			50	μΑ	V <sub>R</sub> =5V

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 3 of 10 Device No.: DSE-0001700 Prepared date:9-June-2009 Prepared by: Niu Yanling



## **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition	
<b>S</b> 1	180	225	mcd		
S2	225	285		I <sub>F</sub> =20mA	
T1	285	360			
T2	360	450			

Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
C B13 B14 B15	B10	517.5	519.5		
	B11	519.5	521.5	nm	I <sub>F</sub> =20mA
	B12	521.5	523.5		
	B13	523.5	525.5		
	B14	525.5	527.5		
	B15	527.5	529.5		

#### **Notes:**


- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 10 Device No.: DSE-0001700 Prepared date:9-June-2009 Prepared by: Niu Yanling


## **EVERLIGHT ELECTRONICS CO., LTD.**

## 17-215/GHC-CS1T2/3T


### **Typical Electro-Optical Characteristics**









#### Forward Current Derating Curve






#### Luminous Intensity vs.



#### Radiation Diagram





## Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

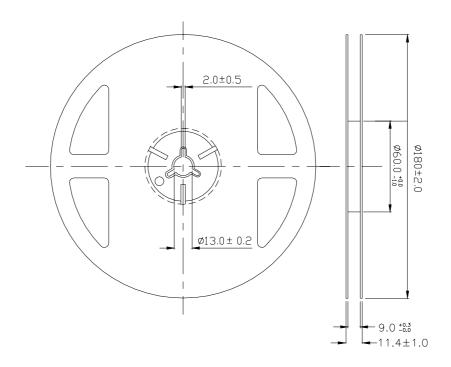


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Device No.: DSE-0001700




## Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

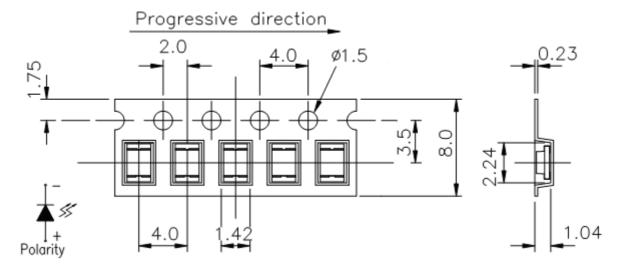

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

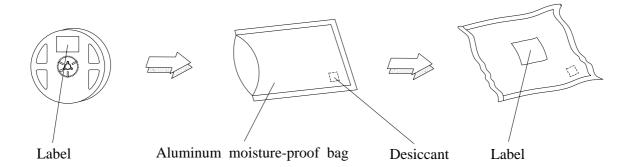

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 7 of 10 Device No.: DSE-0001700 Prepared date:9-June-2009 Prepared by: Niu Yanling



## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Rev.1

Page: 8 of 10

Prepared by: Niu Yanling




#### **Precautions For Use**

Over-current-proof
 Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

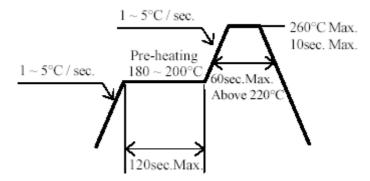

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Rev.1

Page: 9 of 10

Prepared by: Niu Yanling




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

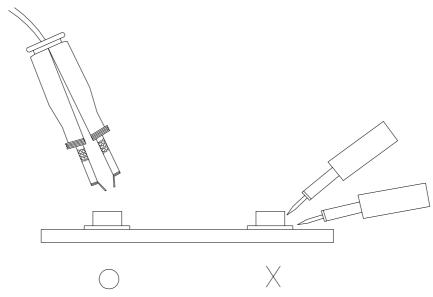

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 10 of 10 Device No.: DSE-0001700 Prepared date:9-June-2009 Prepared by: Niu Yanling