

Technical Data Sheet TOP View LEDs

67-21UYC/S530-XX/TR8

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version

Descriptions

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide


Chip		I ama Calam	
Material	Emitted Color	Lens Color	
AlGaInP	Brilliant Yellow	Water Clear	



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 10

67-21UYC/S530-XX/R8

Package Dimensions

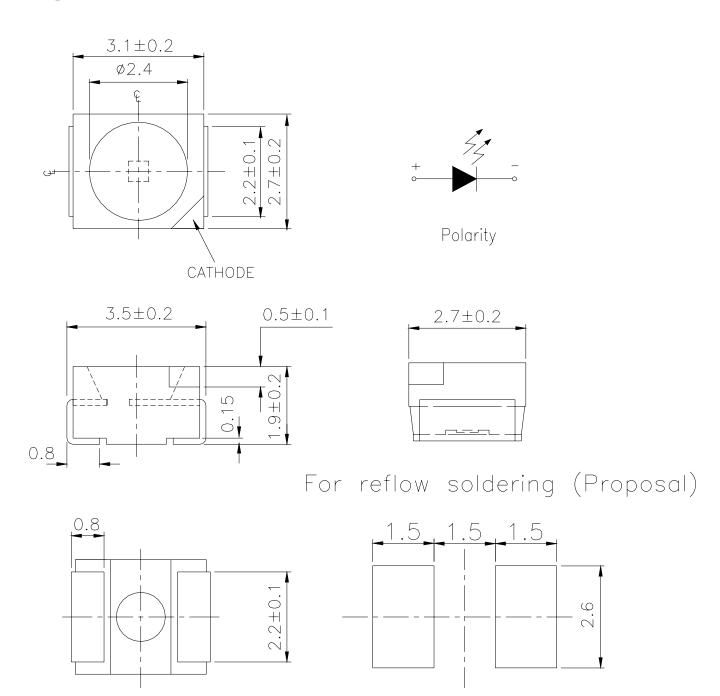

Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 2 of 10



67-21UYC/S530-XX/TR8

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}$
Electrostatic Discharge(HBM)	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 10



67-21 UYC/S530-XX/TR8

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition	
Luminous intensity	Iv	A2	40	55		mcd		
		A3	50	83			I _F =20mA	
		A4	63	95				
		A5	80	123				
		A6	100	154				
Viewing Angle	2 \theta 1/2			120		deg	I _F =20mA	
Peak Wavelength	λp			591		nm	I _F =20mA	
Dominant Wavelength	λd			589		nm	I _F =20mA	
Spectrum Radiation Bandwidth	Δλ			15		nm	I _F =20mA	
Forward Voltage	VF		1.7	2.0	2.4	V	I _F =20mA	
Reverse Current	Ir				10	μ A	V _R =5V	

*67-21UYC/S530-<u>XX</u>/TR8





Chip Rank


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 10 Device No.: DSE-671-151 prepared date: 08.Feb-2006 Prepared by:Teresa Lee


67-21UYC/S530-XX/TR8


Typical Electro-Optical Characteristics Curves

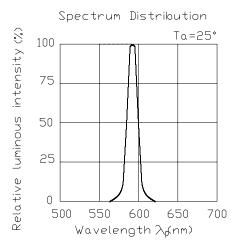






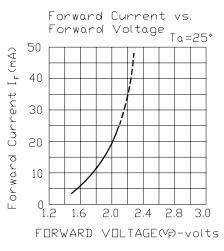







67-21UYC/S530-XX/TR8


Page: 6 of 10

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank

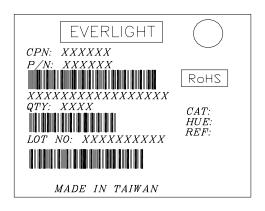

Reel Dimensions

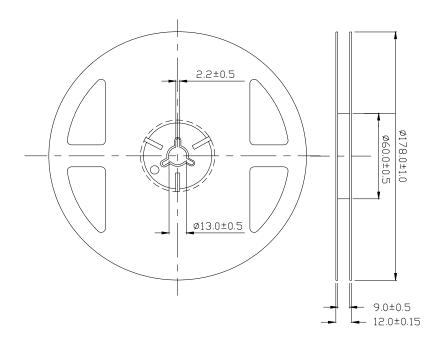


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2




67-21UYC/S530-XX/TR8

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

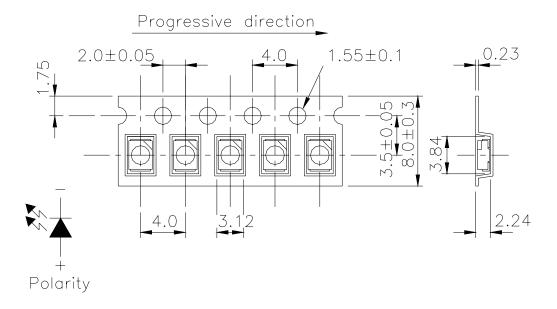

Note: Tolerances Unless Dimension ± 0.1 mm Unit = mm

Moisture Resistant Packaging

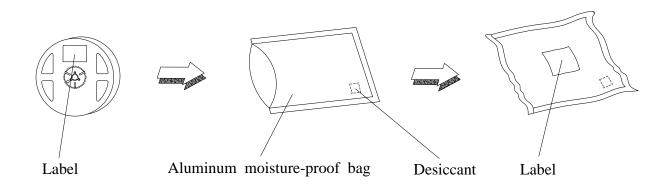

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 10 Device No.: DSE-671-151 prepared date: 08.Feb-2006 Prepared by:Teresa Lee



67-21UYC/S530-XX/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 10 Device No.: DSE-671-151 prepared date: 08.Feb-2006 Prepared by:Teresa Lee



67-21UYC/S530-XX/TR8


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

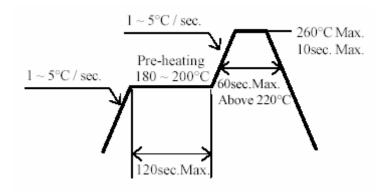

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

r

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 10




67-21UYC/S530-XX/TR8

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

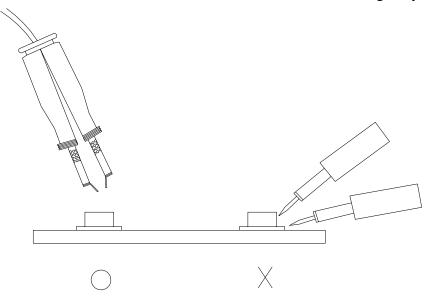

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 10