

# Thick Film Chip Resistor 0603



RoHS  
Compliant




## Features

- Small size and light weight
- Suitable for both wave and reflow soldering
- Reduction of assembly costs

## Performance Specification

Temperature Coefficient	: 1Ω to 10Ω ±400PPM/°C 11Ω to 100Ω ±200PPM/°C >100Ω ±100PPM/°C
Short Time Overload	: ±5% : ±(2% +0.1Ω)Max. ±1% : ±(1% +0.1Ω)Max.
Insulation Resistance	: Min. 1,000MΩ
Dielectric Withstanding Voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal Bending	: ±(1% +0.05Ω) Max.
Soldering Heat	: ±(1% +0.05Ω) Max.
Solderability	: Min. 95% coverage
Temperature Cycling	: ±5% : ±(1% +0.05Ω) Max. ±1% : ±(0.5% +0.05Ω) Max.
Humidity (Steady State)	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(0.5% +0.1Ω) Max.
Load Life in Humidity	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(1% +0.1Ω) Max.
Load Life	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(1% +0.1Ω) Max.


## Derating Curve

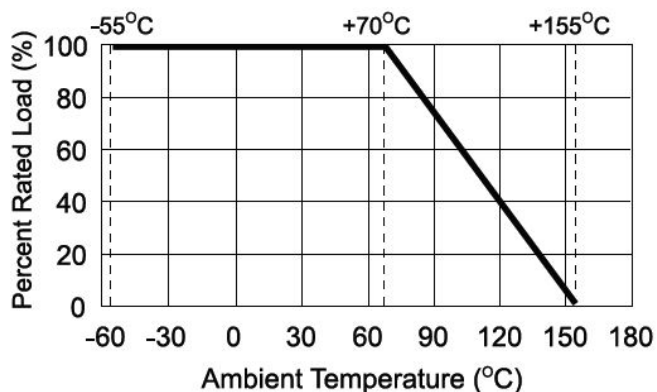

# Thick Film Chip Resistor 0603



## Dimension

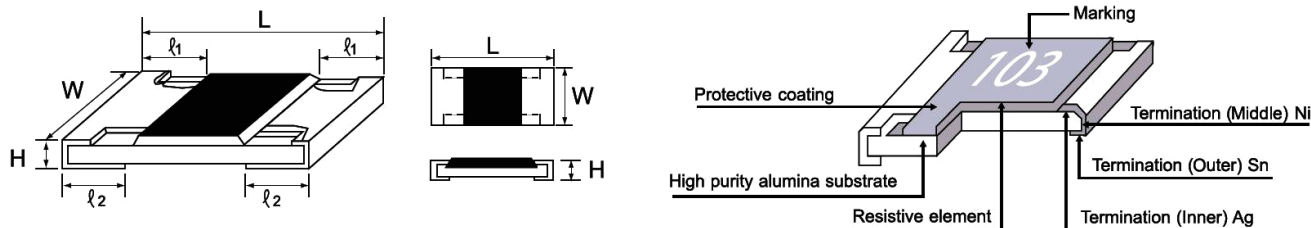

Type	Dimension (mm)				
	L	W	H	ℓ <sub>1</sub>	ℓ <sub>2</sub>
0603	1.6 ±0.1	0.8 <sup>+0.15</sup> / <sub>+0.1</sub>	0.45 ±0.1	0.3 ±0.2	0.3 ±0.2

Type	Power Rating at 70°C	Max. Working Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Tolerance %	Resistance Range
0603	1/10W-S 1/16W	1A	2A	-	Jumper	<50mΩ
		50V	100V	300V	±1%	10Ω to 1MΩ
					±2%	1Ω to 10MΩ
					±5%	1Ω to 10MΩ

## Part Number Table

Description	Part Number
Resistor, 1K, 0.063W, 1%, 0603, Reel	MC0063W060311K
Resistor, 1K, 0.063W, 1%, 0603	MC0063W060311K
Resistor, 1M, 0.063W, 1%, 0603, Reel	MC0063W060311M
Resistor, 1M, 0.063W, 1%, 0603	MC0063W060311M
Resistor, 1R, 0.063W, 1%, 0603, Reel	MC0063W060311R0
Resistor, 1R, 0.063W, 1%, 0603	MC0063W060311R0
Resistor, 1K05, 0.063W, 1%, 0603, Reel	MC0063W060311K05
Resistor, 1K05, 0.063W, 1%, 0603	MC0063W060311K05
Resistor, 1M05, 0.063W, 1%, 0603, Reel	MC0063W060311M05
Resistor, 1M05, 0.063W, 1%, 0603	MC0063W060311M05
Resistor, 1K1, 0.063W, 1%, 0603, Reel	MC0063W060311K1
Resistor, 1K1, 0.063W, 1%, 0603	MC0063W060311K1
Resistor, 1M1, 0.063W, 1%, 0603, Reel	MC0063W060311M10
Resistor, 1M1, 0.063W, 1%, 0603	MC0063W060311M10
Resistor, 1R1, 0.063W, 1%, 0603, Reel	MC0063W060311R10
Resistor, 1R1, 0.063W, 1%, 0603	MC0063W060311R10
Resistor, 1K15, 0.063W, 1%, 0603, Reel	MC0063W060311K15
Resistor, 1K15, 0.063W, 1%, 0603	MC0063W060311K15

Description	Part Number
Resistor, 1M15, 0.063W, 1%, 0603, Reel	MC0063W060311M15
Resistor, 1M15, 0.063W, 1%, 0603	MC0063W060311M15
Resistor, 1R15, 0.063W, 1%, 0603, Reel	MC0063W060311R15
Resistor, 1R15, 0.063W, 1%, 0603	MC0063W060311R15
Resistor, 1K2, 0.063W, 1%, 0603, Reel	MC0063W060311K2
Resistor, 1K2, 0.063W, 1%, 0603	MC0063W060311K2
Resistor, 1M2, 0.063W, 1%, 0603, Reel	MC0063W060311M20
Resistor, 1M2, 0.063W, 1%, 0603	MC0063W060311M20
Resistor, 1R2, 0.063W, 1%, 0603, Reel	MC0063W060311R20
Resistor, 1R2, 0.063W, 1%, 0603	MC0063W060311R20
Resistor, 1K21, 0.063W, 1%, 0603, Reel	MC0063W060311K21
Resistor, 1K21, 0.063W, 1%, 0603	MC0063W060311K21
Resistor, 1M21, 0.063W, 1%, 0603, Reel	MC0063W060311M21
Resistor, 1M21, 0.063W, 1%, 0603	MC0063W060311M21
Resistor, 1R21, 0.063W, 1%, 0603, Reel	MC0063W060311R21
Resistor, 1R21, 0.063W, 1%, 0603	MC0063W060311R21
Resistor, 1K27, 0.063W, 1%, 0603, Reel	MC0063W060311K27
Resistor, 1K27, 0.063W, 1%, 0603	MC0063W060311K27

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 1M27, 0.063W, 1%, 0603, Reel	MC0063W060311M27
Resistor, 1M27, 0.063W, 1%, 0603	MC0063W060311M27
Resistor, 1R27, 0.063W, 1%, 0603, Reel	MC0063W060311R27
Resistor, 1R27, 0.063W, 1%, 0603	MC0063W060311R27
Resistor, 1K3, 0.063W, 1%, 0603, Reel	MC0063W060311K3
Resistor, 1K3, 0.063W, 1%, 0603	MC0063W060311K3
Resistor, 1M3, 0.063W, 1%, 0603, Reel	MC0063W060311M30
Resistor, 1M3, 0.063W, 1%, 0603	MC0063W060311M30
Resistor, 1R3, 0.063W, 1%, 0603, Reel	MC0063W060311R30
Resistor, 1R3, 0.063W, 1%, 0603	MC0063W060311R30
Resistor, 1K33, 0.063W, 1%, 0603, Reel	MC0063W060311K33
Resistor, 1K33, 0.063W, 1%, 0603	MC0063W060311K33
Resistor, 1M33, 0.063W, 1%, 0603, Reel	MC0063W060311M33
Resistor, 1M33, 0.063W, 1%, 0603	MC0063W060311M33
Resistor, 1R33, 0.063W, 1%, 0603, Reel	MC0063W060311R33
Resistor, 1R33, 0.063W, 1%, 0603	MC0063W060311R33
Resistor, 1K4, 0.063W, 1%, 0603, Reel	MC0063W060311K4
Resistor, 1K4, 0.063W, 1%, 0603	MC0063W060311K4
Resistor, 1M4, 0.063W, 1%, 0603, Reel	MC0063W060311M40
Resistor, 1M4, 0.063W, 1%, 0603	MC0063W060311M40
Resistor, 1R4, 0.063W, 1%, 0603, Reel	MC0063W060311R40
Resistor, 1R4, 0.063W, 1%, 0603	MC0063W060311R40
Resistor, 1K47, 0.063W, 1%, 0603, Reel	MC0063W060311K47
Resistor, 1K47, 0.063W, 1%, 0603	MC0063W060311K47
Resistor, 1R47, 0.063W, 1%, 0603, Reel	MC0063W060311R47
Resistor, 1R47, 0.063W, 1%, 0603	MC0063W060311R47
Resistor, 1K5, 0.063W, 1%, 0603, Reel	MC0063W060311K5
Resistor, 1K5, 0.063W, 1%, 0603	MC0063W060311K5
Resistor, 1M5, 0.063W, 1%, 0603, Reel	MC0063W060311M50
Resistor, 1M5, 0.063W, 1%, 0603	MC0063W060311M50
Resistor, 1R5, 0.063W, 1%, 0603, Reel	MC0063W060311R5
Resistor, 1R5, 0.063W, 1%, 0603	MC0063W060311R5
Resistor, 1K54, 0.063W, 1%, 0603, Reel	MC0063W060311K54
Resistor, 1K54, 0.063W, 1%, 0603	MC0063W060311K54
Resistor, 1M54, 0.063W, 1%, 0603, Reel	MC0063W060311M54
Resistor, 1M54, 0.063W, 1%, 0603	MC0063W060311M54
Resistor, 1R54, 0.063W, 1%, 0603, Reel	MC0063W060311R54
Resistor, 1R54, 0.063W, 1%, 0603	MC0063W060311R54
Resistor, 1K6, 0.063W, 1%, 0603, Reel	MC0063W060311K6

Description	Part Number
Resistor, 1K6, 0.063W, 1%, 0603	MC0063W060311K6
Resistor, 1M6, 0.063W, 1%, 0603, Reel	MC0063W060311M60
Resistor, 1M6, 0.063W, 1%, 0603	MC0063W060311M60
Resistor, 1R6, 0.063W, 1%, 0603, Reel	MC0063W060311R60
Resistor, 1R6, 0.063W, 1%, 0603	MC0063W060311R60
Resistor, 1K62, 0.063W, 1%, 0603, Reel	MC0063W060311K62
Resistor, 1K62, 0.063W, 1%, 0603	MC0063W060311K62
Resistor, 1M62, 0.063W, 1%, 0603, Reel	MC0063W060311M62
Resistor, 1M62, 0.063W, 1%, 0603	MC0063W060311M62
Resistor, 1R62, 0.063W, 1%, 0603, Reel	MC0063W060311R62
Resistor, 1R62, 0.063W, 1%, 0603	MC0063W060311R62
Resistor, 1K69, 0.063W, 1%, 0603, Reel	MC0063W060311K69
Resistor, 1K69, 0.063W, 1%, 0603	MC0063W060311K69
Resistor, 1M69, 0.063W, 1%, 0603, Reel	MC0063W060311M69
Resistor, 1M69, 0.063W, 1%, 0603	MC0063W060311M69
Resistor, 1K78, 0.063W, 1%, 0603, Reel	MC0063W060311K78
Resistor, 1K78, 0.063W, 1%, 0603	MC0063W060311K78
Resistor, 1M78, 0.063W, 1%, 0603, Reel	MC0063W060311M78
Resistor, 1M78, 0.063W, 1%, 0603	MC0063W060311M78
Resistor, 1R78, 0.063W, 1%, 0603, Reel	MC0063W060311R78
Resistor, 1R78, 0.063W, 1%, 0603	MC0063W060311R78
Resistor, 1K8, 0.063W, 1%, 0603, Reel	MC0063W060311K8
Resistor, 1K8, 0.063W, 1%, 0603	MC0063W060311K8
Resistor, 1M8, 0.063W, 1%, 0603, Reel	MC0063W060311M80
Resistor, 1M8, 0.063W, 1%, 0603	MC0063W060311M80
Resistor, 1R8, 0.063W, 1%, 0603, Reel	MC0063W060311R80
Resistor, 1R8, 0.063W, 1%, 0603	MC0063W060311R80
Resistor, 1K87, 0.063W, 1%, 0603, Reel	MC0063W060311K87
Resistor, 1K87, 0.063W, 1%, 0603	MC0063W060311K87
Resistor, 1M87, 0.063W, 1%, 0603, Reel	MC0063W060311M87
Resistor, 1M87, 0.063W, 1%, 0603	MC0063W060311M87
Resistor, 1R87, 0.063W, 1%, 0603, Reel	MC0063W060311R87
Resistor, 1R87, 0.063W, 1%, 0603	MC0063W060311R87
Resistor, 1K96, 0.063W, 1%, 0603, Reel	MC0063W060311K96
Resistor, 1K96, 0.063W, 1%, 0603	MC0063W060311K96
Resistor, 1R96, 0.063W, 1%, 0603, Reel	MC0063W060311R96
Resistor, 1R96, 0.063W, 1%, 0603	MC0063W060311R96
Resistor, 10K, 0.063W, 1%, 0603, Reel	MC0063W0603110K
Resistor, 10K, 0.063W, 1%, 0603	MC0063W0603110K

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 10M, 0.063W, 1%, 0603, Reel	MC0063W0603110M0
Resistor, 10M, 0.063W, 1%, 0603	MC0063W0603110M0
Resistor, 10R, 0.063W, 1%, 0603, Reel	MC0063W0603110R
Resistor, 10R, 0.063W, 1%, 0603	MC0063W0603110R
Resistor, 10K5, 0.063W, 1%, 0603, Reel	MC0063W0603110K5
Resistor, 10K5, 0.063W, 1%, 0603	MC0063W0603110K5
Resistor, 10R5, 0.063W, 1%, 0603, Reel	MC0063W0603110R5
Resistor, 10R5, 0.063W, 1%, 0603	MC0063W0603110R5
Resistor, 100K, 0.063W, 1%, 0603, Reel	MC0063W06031100K
Resistor, 100K, 0.063W, 1%, 0603	MC0063W06031100K
Resistor, 100R, 0.063W, 1%, 0603, Reel	MC0063W06031100R
Resistor, 100R, 0.063W, 1%, 0603	MC0063W06031100R
Resistor, 105K, 0.063W, 1%, 0603, Reel	MC0063W06031105K
Resistor, 105K, 0.063W, 1%, 0603	MC0063W06031105K
Resistor, 105R, 0.063W, 1%, 0603, Reel	MC0063W06031105R
Resistor, 105R, 0.063W, 1%, 0603	MC0063W06031105R
Resistor, 11K, 0.063W, 1%, 0603, Reel	MC0063W0603111K
Resistor, 11K, 0.063W, 1%, 0603	MC0063W0603111K
Resistor, 11R, 0.063W, 1%, 0603, Reel	MC0063W0603111R
Resistor, 11R, 0.063W, 1%, 0603	MC0063W0603111R
Resistor, 11K5, 0.063W, 1%, 0603, Reel	MC0063W0603111K5
Resistor, 11K5, 0.063W, 1%, 0603	MC0063W0603111K5
Resistor, 11R5, 0.063W, 1%, 0603, Reel	MC0063W0603111R5
Resistor, 11R5, 0.063W, 1%, 0603	MC0063W0603111R5
Resistor, 110K, 0.063W, 1%, 0603, Reel	MC0063W06031110K
Resistor, 110K, 0.063W, 1%, 0603	MC0063W06031110K
Resistor, 110R, 0.063W, 1%, 0603, Reel	MC0063W06031110R
Resistor, 110R, 0.063W, 1%, 0603	MC0063W06031110R
Resistor, 115K, 0.063W, 1%, 0603, Reel	MC0063W06031115K
Resistor, 115K, 0.063W, 1%, 0603	MC0063W06031115K
Resistor, 115R, 0.063W, 1%, 0603, Reel	MC0063W06031115R
Resistor, 115R, 0.063W, 1%, 0603	MC0063W06031115R
Resistor, 12K, 0.063W, 1%, 0603, Reel	MC0063W0603112K
Resistor, 12K, 0.063W, 1%, 0603	MC0063W0603112K
Resistor, 12R, 0.063W, 1%, 0603, Reel	MC0063W0603112R
Resistor, 12R, 0.063W, 1%, 0603	MC0063W0603112R
Resistor, 12K1, 0.063W, 1%, 0603, Reel	MC0063W0603112K1
Resistor, 12K1, 0.063W, 1%, 0603	MC0063W0603112K1
Resistor, 12R1, 0.063W, 1%, 0603, Reel	MC0063W0603112R1

Description	Part Number
Resistor, 12R1, 0.063W, 1%, 0603	MC0063W0603112R1
Resistor, 12K4, 0.063W, 1%, 0603, Reel	MC0063W0603112K4
Resistor, 12K4, 0.063W, 1%, 0603	MC0063W0603112K4
Resistor, 12K7, 0.063W, 1%, 0603, Reel	MC0063W0603112K7
Resistor, 12K7, 0.063W, 1%, 0603	MC0063W0603112K7
Resistor, 120K, 0.063W, 1%, 0603, Reel	MC0063W06031120K
Resistor, 120K, 0.063W, 1%, 0603	MC0063W06031120K
Resistor, 120R, 0.063W, 1%, 0603, Reel	MC0063W06031120R
Resistor, 120R, 0.063W, 1%, 0603	MC0063W06031120R
Resistor, 121K, 0.063W, 1%, 0603, Reel	MC0063W06031121K
Resistor, 121K, 0.063W, 1%, 0603	MC0063W06031121K
Resistor, 121R, 0.063W, 1%, 0603, Reel	MC0063W06031121R
Resistor, 121R, 0.063W, 1%, 0603	MC0063W06031121R
Resistor, 127K, 0.063W, 1%, 0603, Reel	MC0063W06031127K
Resistor, 127K, 0.063W, 1%, 0603	MC0063W06031127K
Resistor, 127R, 0.063W, 1%, 0603, Reel	MC0063W06031127R
Resistor, 127R, 0.063W, 1%, 0603	MC0063W06031127R
Resistor, 13K, 0.063W, 1%, 0603, Reel	MC0063W0603113K
Resistor, 13K, 0.063W, 1%, 0603	MC0063W0603113K
Resistor, 13R, 0.063W, 1%, 0603, Reel	MC0063W0603113R
Resistor, 13R, 0.063W, 1%, 0603	MC0063W0603113R
Resistor, 13K3, 0.063W, 1%, 0603, Reel	MC0063W0603113K3
Resistor, 13K3, 0.063W, 1%, 0603	MC0063W0603113K3
Resistor, 130K, 0.063W, 1%, 0603, Reel	MC0063W06031130K
Resistor, 130K, 0.063W, 1%, 0603	MC0063W06031130K
Resistor, 130R, 0.063W, 1%, 0603, Reel	MC0063W06031130R
Resistor, 130R, 0.063W, 1%, 0603	MC0063W06031130R
Resistor, 133K, 0.063W, 1%, 0603, Reel	MC0063W06031133K
Resistor, 133K, 0.063W, 1%, 0603	MC0063W06031133K
Resistor, 133R, 0.063W, 1%, 0603, Reel	MC0063W06031133R
Resistor, 133R, 0.063W, 1%, 0603	MC0063W06031133R
Resistor, 14K, 0.063W, 1%, 0603, Reel	MC0063W0603114K
Resistor, 14K, 0.063W, 1%, 0603	MC0063W0603114K
Resistor, 14R, 0.063W, 1%, 0603, Reel	MC0063W0603114R
Resistor, 14R, 0.063W, 1%, 0603	MC0063W0603114R
Resistor, 14K7, 0.063W, 1%, 0603, Reel	MC0063W0603114K7
Resistor, 14K7, 0.063W, 1%, 0603	MC0063W0603114K7
Resistor, 14R7, 0.063W, 1%, 0603, Reel	MC0063W0603114R7
Resistor, 14R7, 0.063W, 1%, 0603	MC0063W0603114R7

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 140K, 0.063W, 1%, 0603, Reel	MC0063W06031140K
Resistor, 140K, 0.063W, 1%, 0603	MC0063W06031140K
Resistor, 140R, 0.063W, 1%, 0603, Reel	MC0063W06031140R
Resistor, 140R, 0.063W, 1%, 0603	MC0063W06031140R
Resistor, 147K, 0.063W, 1%, 0603, Reel	MC0063W06031147K
Resistor, 147K, 0.063W, 1%, 0603	MC0063W06031147K
Resistor, 147R, 0.063W, 1%, 0603, Reel	MC0063W06031147R
Resistor, 147R, 0.063W, 1%, 0603	MC0063W06031147R
Resistor, 15K, 0.063W, 1%, 0603, Reel	MC0063W0603115K
Resistor, 15K, 0.063W, 1%, 0603	MC0063W0603115K
Resistor, 15R, 0.063W, 1%, 0603, Reel	MC0063W0603115R
Resistor, 15R, 0.063W, 1%, 0603	MC0063W0603115R
Resistor, 15K4, 0.063W, 1%, 0603, Reel	MC0063W0603115K4
Resistor, 15K4, 0.063W, 1%, 0603	MC0063W0603115K4
Resistor, 15R4, 0.063W, 1%, 0603, Reel	MC0063W0603115R4
Resistor, 15R4, 0.063W, 1%, 0603	MC0063W0603115R4
Resistor, 150K, 0.063W, 1%, 0603, Reel	MC0063W06031150K
Resistor, 150K, 0.063W, 1%, 0603	MC0063W06031150K
Resistor, 150R, 0.063W, 1%, 0603, Reel	MC0063W06031150R
Resistor, 150R, 0.063W, 1%, 0603	MC0063W06031150R
Resistor, 154K, 0.063W, 1%, 0603, Reel	MC0063W06031154K
Resistor, 154K, 0.063W, 1%, 0603	MC0063W06031154K
Resistor, 154R, 0.063W, 1%, 0603, Reel	MC0063W06031154R
Resistor, 154R, 0.063W, 1%, 0603	MC0063W06031154R
Resistor, 16K, 0.063W, 1%, 0603, Reel	MC0063W0603116K
Resistor, 16K, 0.063W, 1%, 0603	MC0063W0603116K
Resistor, 16R, 0.063W, 1%, 0603, Reel	MC0063W0603116R
Resistor, 16R, 0.063W, 1%, 0603	MC0063W0603116R
Resistor, 16K2, 0.063W, 1%, 0603, Reel	MC0063W0603116K2
Resistor, 16K2, 0.063W, 1%, 0603	MC0063W0603116K2
Resistor, 16R2, 0.063W, 1%, 0603, Reel	MC0063W0603116R2
Resistor, 16R2, 0.063W, 1%, 0603	MC0063W0603116R2
Resistor, 16K9, 0.063W, 1%, 0603, Reel	MC0063W0603116K9
Resistor, 16K9, 0.063W, 1%, 0603	MC0063W0603116K9
Resistor, 16R9, 0.063W, 1%, 0603, Reel	MC0063W0603116R9
Resistor, 16R9, 0.063W, 1%, 0603	MC0063W0603116R9
Resistor, 160K, 0.063W, 1%, 0603, Reel	MC0063W06031160K
Resistor, 160K, 0.063W, 1%, 0603	MC0063W06031160K
Resistor, 160R, 0.063W, 1%, 0603, Reel	MC0063W06031160R

Description	Part Number
Resistor, 160R, 0.063W, 1%, 0603	MC0063W06031160R
Resistor, 162K, 0.063W, 1%, 0603, Reel	MC0063W06031162K
Resistor, 162K, 0.063W, 1%, 0603	MC0063W06031162K
Resistor, 162R, 0.063W, 1%, 0603, Reel	MC0063W06031162R
Resistor, 162R, 0.063W, 1%, 0603	MC0063W06031162R
Resistor, 169K, 0.063W, 1%, 0603, Reel	MC0063W06031169K
Resistor, 169K, 0.063W, 1%, 0603	MC0063W06031169K
Resistor, 169R, 0.063W, 1%, 0603, Reel	MC0063W06031169R
Resistor, 169R, 0.063W, 1%, 0603	MC0063W06031169R
Resistor, 17K8, 0.063W, 1%, 0603, Reel	MC0063W0603117K8
Resistor, 17K8, 0.063W, 1%, 0603	MC0063W0603117K8
Resistor, 17R8, 0.063W, 1%, 0603, Reel	MC0063W0603117R8
Resistor, 17R8, 0.063W, 1%, 0603	MC0063W0603117R8
Resistor, 178K, 0.063W, 1%, 0603, Reel	MC0063W06031178K
Resistor, 178K, 0.063W, 1%, 0603	MC0063W06031178K
Resistor, 178R, 0.063W, 1%, 0603, Reel	MC0063W06031178R
Resistor, 178R, 0.063W, 1%, 0603	MC0063W06031178R
Resistor, 18K, 0.063W, 1%, 0603, Reel	MC0063W0603118K
Resistor, 18K, 0.063W, 1%, 0603	MC0063W0603118K
Resistor, 18R, 0.063W, 1%, 0603, Reel	MC0063W0603118R
Resistor, 18R, 0.063W, 1%, 0603	MC0063W0603118R
Resistor, 18K7, 0.063W, 1%, 0603, Reel	MC0063W0603118K7
Resistor, 18K7, 0.063W, 1%, 0603	MC0063W0603118K7
Resistor, 18R7, 0.063W, 1%, 0603, Reel	MC0063W0603118R7
Resistor, 18R7, 0.063W, 1%, 0603	MC0063W0603118R7
Resistor, 180K, 0.063W, 1%, 0603, Reel	MC0063W06031180K
Resistor, 180K, 0.063W, 1%, 0603	MC0063W06031180K
Resistor, 180R, 0.063W, 1%, 0603, Reel	MC0063W06031180R
Resistor, 180R, 0.063W, 1%, 0603	MC0063W06031180R
Resistor, 187K, 0.063W, 1%, 0603, Reel	MC0063W06031187K
Resistor, 187K, 0.063W, 1%, 0603	MC0063W06031187K
Resistor, 187R, 0.063W, 1%, 0603, Reel	MC0063W06031187R
Resistor, 187R, 0.063W, 1%, 0603	MC0063W06031187R
Resistor, 19K6, 0.063W, 1%, 0603, Reel	MC0063W0603119K6
Resistor, 19K6, 0.063W, 1%, 0603	MC0063W0603119K6
Resistor, 19R6, 0.063W, 1%, 0603, Reel	MC0063W0603119R6
Resistor, 19R6, 0.063W, 1%, 0603	MC0063W0603119R6
Resistor, 196K, 0.063W, 1%, 0603, Reel	MC0063W06031196K
Resistor, 196K, 0.063W, 1%, 0603	MC0063W06031196K

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 196R, 0.063W, 1%, 0603, Reel	MC0063W06031196R
Resistor, 196R, 0.063W, 1%, 0603	MC0063W06031196R
Resistor, 2K, 0.063W, 1%, 0603, Reel	MC0063W060312K
Resistor, 2K, 0.063W, 1%, 0603	MC0063W060312K
Resistor, 2M, 0.063W, 1%, 0603, Reel	MC0063W060312M00
Resistor, 2M, 0.063W, 1%, 0603	MC0063W060312M00
Resistor, 2R, 0.063W, 1%, 0603, Reel	MC0063W060312R0
Resistor, 2R, 0.063W, 1%, 0603	MC0063W060312R0
Resistor, 2K05, 0.063W, 1%, 0603, Reel	MC0063W060312K05
Resistor, 2K05, 0.063W, 1%, 0603	MC0063W060312K05
Resistor, 2K15, 0.063W, 1%, 0603, Reel	MC0063W060312K15
Resistor, 2K15, 0.063W, 1%, 0603	MC0063W060312K15
Resistor, 2K2, 0.063W, 1%, 0603, Reel	MC0063W060312K2
Resistor, 2K2, 0.063W, 1%, 0603	MC0063W060312K2
Resistor, 2M2, 0.063W, 1%, 0603, Reel	MC0063W060312M20
Resistor, 2M2, 0.063W, 1%, 0603	MC0063W060312M20
Resistor, 2R2, 0.063W, 1%, 0603, Reel	MC0063W060312R2
Resistor, 2R2, 0.063W, 1%, 0603	MC0063W060312R2
Resistor, 2K26, 0.063W, 1%, 0603, Reel	MC0063W060312K26
Resistor, 2K26, 0.063W, 1%, 0603	MC0063W060312K26
Resistor, 2M26, 0.063W, 1%, 0603, Reel	MC0063W060312M26
Resistor, 2M26, 0.063W, 1%, 0603	MC0063W060312M26
Resistor, 2K37, 0.063W, 1%, 0603, Reel	MC0063W060312K37
Resistor, 2K37, 0.063W, 1%, 0603	MC0063W060312K37
Resistor, 2M37, 0.063W, 1%, 0603, Reel	MC0063W060312M37
Resistor, 2M37, 0.063W, 1%, 0603	MC0063W060312M37
Resistor, 2K4, 0.063W, 1%, 0603, Reel	MC0063W060312K4
Resistor, 2K4, 0.063W, 1%, 0603	MC0063W060312K4
Resistor, 2M4, 0.063W, 1%, 0603, Reel	MC0063W060312M40
Resistor, 2M4, 0.063W, 1%, 0603	MC0063W060312M40
Resistor, 2R4, 0.063W, 1%, 0603, Reel	MC0063W060312R40
Resistor, 2R4, 0.063W, 1%, 0603	MC0063W060312R40
Resistor, 2K49, 0.063W, 1%, 0603, Reel	MC0063W060312K49
Resistor, 2K49, 0.063W, 1%, 0603	MC0063W060312K49
Resistor, 2M49, 0.063W, 1%, 0603, Reel	MC0063W060312M49
Resistor, 2M49, 0.063W, 1%, 0603	MC0063W060312M49
Resistor, 2R49, 0.063W, 1%, 0603, Reel	MC0063W060312R49
Resistor, 2R49, 0.063W, 1%, 0603	MC0063W060312R49
Resistor, 2K61, 0.063W, 1%, 0603, Reel	MC0063W060312K61

Description	Part Number
Resistor, 2K61, 0.063W, 1%, 0603	MC0063W060312K61
Resistor, 2M61, 0.063W, 1%, 0603, Reel	MC0063W060312M61
Resistor, 2M61, 0.063W, 1%, 0603	MC0063W060312M61
Resistor, 2K7, 0.063W, 1%, 0603, Reel	MC0063W060312K7
Resistor, 2K7, 0.063W, 1%, 0603	MC0063W060312K7
Resistor, 2M7, 0.063W, 1%, 0603, Reel	MC0063W060312M70
Resistor, 2M7, 0.063W, 1%, 0603	MC0063W060312M70
Resistor, 2R7, 0.063W, 1%, 0603, Reel	MC0063W060312R70
Resistor, 2R7, 0.063W, 1%, 0603	MC0063W060312R70
Resistor, 2K74, 0.063W, 1%, 0603, Reel	MC0063W060312K74
Resistor, 2K74, 0.063W, 1%, 0603	MC0063W060312K74
Resistor, 2M74, 0.063W, 1%, 0603, Reel	MC0063W060312M74
Resistor, 2M74, 0.063W, 1%, 0603	MC0063W060312M74
Resistor, 2R74, 0.063W, 1%, 0603, Reel	MC0063W060312R74
Resistor, 2R74, 0.063W, 1%, 0603	MC0063W060312R74
Resistor, 2K87, 0.063W, 1%, 0603, Reel	MC0063W060312K87
Resistor, 2K87, 0.063W, 1%, 0603	MC0063W060312K87
Resistor, 2M87, 0.063W, 1%, 0603, Reel	MC0063W060312M87
Resistor, 2M87, 0.063W, 1%, 0603	MC0063W060312M87
Resistor, 2R87, 0.063W, 1%, 0603, Reel	MC0063W060312R87
Resistor, 2R87, 0.063W, 1%, 0603	MC0063W060312R87
Resistor, 20K, 0.063W, 1%, 0603, Reel	MC0063W0603120K
Resistor, 20K, 0.063W, 1%, 0603	MC0063W0603120K
Resistor, 20R, 0.063W, 1%, 0603, Reel	MC0063W0603120R
Resistor, 20R, 0.063W, 1%, 0603	MC0063W0603120R
Resistor, 20K5, 0.063W, 1%, 0603, Reel	MC0063W0603120K5
Resistor, 20K5, 0.063W, 1%, 0603	MC0063W0603120K5
Resistor, 20R5, 0.063W, 1%, 0603, Reel	MC0063W0603120R5
Resistor, 20R5, 0.063W, 1%, 0603	MC0063W0603120R5
Resistor, 200K, 0.063W, 1%, 0603, Reel	MC0063W06031200K
Resistor, 200K, 0.063W, 1%, 0603	MC0063W06031200K
Resistor, 200R, 0.063W, 1%, 0603, Reel	MC0063W06031200R
Resistor, 200R, 0.063W, 1%, 0603	MC0063W06031200R
Resistor, 205K, 0.063W, 1%, 0603, Reel	MC0063W06031205K
Resistor, 205K, 0.063W, 1%, 0603	MC0063W06031205K
Resistor, 205R, 0.063W, 1%, 0603, Reel	MC0063W06031205R
Resistor, 205R, 0.063W, 1%, 0603	MC0063W06031205R
Resistor, 21K5, 0.063W, 1%, 0603, Reel	MC0063W0603121K5
Resistor, 21K5, 0.063W, 1%, 0603	MC0063W0603121K5



# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 21R5, 0.063W, 1%, 0603, Reel	MC0063W0603121R5
Resistor, 21R5, 0.063W, 1%, 0603	MC0063W0603121R5
Resistor, 215K, 0.063W, 1%, 0603, Reel	MC0063W06031215K
Resistor, 215K, 0.063W, 1%, 0603	MC0063W06031215K
Resistor, 215R, 0.063W, 1%, 0603, Reel	MC0063W06031215R
Resistor, 215R, 0.063W, 1%, 0603	MC0063W06031215R
Resistor, 22K, 0.063W, 1%, 0603, Reel	MC0063W0603122K
Resistor, 22K, 0.063W, 1%, 0603	MC0063W0603122K
Resistor, 22R, 0.063W, 1%, 0603, Reel	MC0063W0603122R
Resistor, 22R, 0.063W, 1%, 0603	MC0063W0603122R
Resistor, 22K6, 0.063W, 1%, 0603, Reel	MC0063W0603122K6
Resistor, 22K6, 0.063W, 1%, 0603	MC0063W0603122K6
Resistor, 22R6, 0.063W, 1%, 0603, Reel	MC0063W0603122R6
Resistor, 22R6, 0.063W, 1%, 0603	MC0063W0603122R6
Resistor, 220K, 0.063W, 1%, 0603, Reel	MC0063W06031220K
Resistor, 220K, 0.063W, 1%, 0603	MC0063W06031220K
Resistor, 220R, 0.063W, 1%, 0603, Reel	MC0063W06031220R
Resistor, 220R, 0.063W, 1%, 0603	MC0063W06031220R
Resistor, 226K, 0.063W, 1%, 0603, Reel	MC0063W06031226K
Resistor, 226K, 0.063W, 1%, 0603	MC0063W06031226K
Resistor, 226R, 0.063W, 1%, 0603, Reel	MC0063W06031226R
Resistor, 226R, 0.063W, 1%, 0603	MC0063W06031226R
Resistor, 23K7, 0.063W, 1%, 0603, Reel	MC0063W0603123K7
Resistor, 23K7, 0.063W, 1%, 0603	MC0063W0603123K7
Resistor, 23R7, 0.063W, 1%, 0603, Reel	MC0063W0603123R7
Resistor, 23R7, 0.063W, 1%, 0603	MC0063W0603123R7
Resistor, 237K, 0.063W, 1%, 0603, Reel	MC0063W06031237K
Resistor, 237K, 0.063W, 1%, 0603	MC0063W06031237K
Resistor, 237R, 0.063W, 1%, 0603, Reel	MC0063W06031237R
Resistor, 237R, 0.063W, 1%, 0603	MC0063W06031237R
Resistor, 24K, 0.063W, 1%, 0603, Reel	MC0063W0603124K
Resistor, 24K, 0.063W, 1%, 0603	MC0063W0603124K
Resistor, 24R, 0.063W, 1%, 0603, Reel	MC0063W0603124R
Resistor, 24R, 0.063W, 1%, 0603	MC0063W0603124R
Resistor, 24K9, 0.063W, 1%, 0603, Reel	MC0063W0603124K9
Resistor, 24K9, 0.063W, 1%, 0603	MC0063W0603124K9
Resistor, 24R9, 0.063W, 1%, 0603, Reel	MC0063W0603124R9
Resistor, 24R9, 0.063W, 1%, 0603	MC0063W0603124R9
Resistor, 240K, 0.063W, 1%, 0603, Reel	MC0063W06031240K

Description	Part Number
Resistor, 240K, 0.063W, 1%, 0603	MC0063W06031240K
Resistor, 240R, 0.063W, 1%, 0603, Reel	MC0063W06031240R
Resistor, 240R, 0.063W, 1%, 0603	MC0063W06031240R
Resistor, 249K, 0.063W, 1%, 0603, Reel	MC0063W06031249K
Resistor, 249K, 0.063W, 1%, 0603	MC0063W06031249K
Resistor, 249R, 0.063W, 1%, 0603, Reel	MC0063W06031249R
Resistor, 249R, 0.063W, 1%, 0603	MC0063W06031249R
Resistor, 26K1, 0.063W, 1%, 0603, Reel	MC0063W0603126K1
Resistor, 26K1, 0.063W, 1%, 0603	MC0063W0603126K1
Resistor, 26R1, 0.063W, 1%, 0603, Reel	MC0063W0603126R1
Resistor, 26R1, 0.063W, 1%, 0603	MC0063W0603126R1
Resistor, 261K, 0.063W, 1%, 0603, Reel	MC0063W06031261K
Resistor, 261K, 0.063W, 1%, 0603	MC0063W06031261K
Resistor, 261R, 0.063W, 1%, 0603, Reel	MC0063W06031261R
Resistor, 261R, 0.063W, 1%, 0603	MC0063W06031261R
Resistor, 27K, 0.063W, 1%, 0603, Reel	MC0063W0603127K
Resistor, 27K, 0.063W, 1%, 0603	MC0063W0603127K
Resistor, 27R, 0.063W, 1%, 0603, Reel	MC0063W0603127R
Resistor, 27R, 0.063W, 1%, 0603	MC0063W0603127R
Resistor, 27K4, 0.063W, 1%, 0603, Reel	MC0063W0603127K4
Resistor, 27K4, 0.063W, 1%, 0603	MC0063W0603127K4
Resistor, 27R4, 0.063W, 1%, 0603, Reel	MC0063W0603127R4
Resistor, 27R4, 0.063W, 1%, 0603	MC0063W0603127R4
Resistor, 270K, 0.063W, 1%, 0603, Reel	MC0063W06031270K
Resistor, 270K, 0.063W, 1%, 0603	MC0063W06031270K
Resistor, 270R, 0.063W, 1%, 0603, Reel	MC0063W06031270R
Resistor, 270R, 0.063W, 1%, 0603	MC0063W06031270R
Resistor, 274K, 0.063W, 1%, 0603, Reel	MC0063W06031274K
Resistor, 274K, 0.063W, 1%, 0603	MC0063W06031274K
Resistor, 274R, 0.063W, 1%, 0603, Reel	MC0063W06031274R
Resistor, 274R, 0.063W, 1%, 0603	MC0063W06031274R
Resistor, 28K7, 0.063W, 1%, 0603, Reel	MC0063W0603128K7
Resistor, 28K7, 0.063W, 1%, 0603	MC0063W0603128K7
Resistor, 28R7, 0.063W, 1%, 0603, Reel	MC0063W0603128R7
Resistor, 28R7, 0.063W, 1%, 0603	MC0063W0603128R7
Resistor, 287K, 0.063W, 1%, 0603, Reel	MC0063W06031287K
Resistor, 287K, 0.063W, 1%, 0603	MC0063W06031287K
Resistor, 287R, 0.063W, 1%, 0603, Reel	MC0063W06031287R
Resistor, 287R, 0.063W, 1%, 0603	MC0063W06031287R

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 3K, 0.063W, 1%, 0603, Reel	MC0063W060313K
Resistor, 3K, 0.063W, 1%, 0603	MC0063W060313K
Resistor, 3M, 0.063W, 1%, 0603, Reel	MC0063W060313M00
Resistor, 3M, 0.063W, 1%, 0603	MC0063W060313M00
Resistor, 3R, 0.063W, 1%, 0603, Reel	MC0063W060313R0
Resistor, 3R, 0.063W, 1%, 0603	MC0063W060313R0
Resistor, 3K01, 0.063W, 1%, 0603, Reel	MC0063W060313K01
Resistor, 3K01, 0.063W, 1%, 0603	MC0063W060313K01
Resistor, 3M01, 0.063W, 1%, 0603, Reel	MC0063W060313M01
Resistor, 3M01, 0.063W, 1%, 0603	MC0063W060313M01
Resistor, 3K16, 0.063W, 1%, 0603, Reel	MC0063W060313K16
Resistor, 3K16, 0.063W, 1%, 0603	MC0063W060313K16
Resistor, 3R16, 0.063W, 1%, 0603, Reel	MC0063W060313R16
Resistor, 3R16, 0.063W, 1%, 0603	MC0063W060313R16
Resistor, 3K3, 0.063W, 1%, 0603, Reel	MC0063W060313K3
Resistor, 3K3, 0.063W, 1%, 0603	MC0063W060313K3
Resistor, 3M3, 0.063W, 1%, 0603, Reel	MC0063W060313M30
Resistor, 3M3, 0.063W, 1%, 0603	MC0063W060313M30
Resistor, 3R3, 0.063W, 1%, 0603, Reel	MC0063W060313R3
Resistor, 3R3, 0.063W, 1%, 0603	MC0063W060313R3
Resistor, 3K32, 0.063W, 1%, 0603, Reel	MC0063W060313K32
Resistor, 3K32, 0.063W, 1%, 0603	MC0063W060313K32
Resistor, 3M32, 0.063W, 1%, 0603, Reel	MC0063W060313M32
Resistor, 3M32, 0.063W, 1%, 0603	MC0063W060313M32
Resistor, 3R32, 0.063W, 1%, 0603, Reel	MC0063W060313R32
Resistor, 3R32, 0.063W, 1%, 0603	MC0063W060313R32
Resistor, 3K48, 0.063W, 1%, 0603, Reel	MC0063W060313K48
Resistor, 3K48, 0.063W, 1%, 0603	MC0063W060313K48
Resistor, 3M48, 0.063W, 1%, 0603, Reel	MC0063W060313M48
Resistor, 3M48, 0.063W, 1%, 0603	MC0063W060313M48
Resistor, 3R48, 0.063W, 1%, 0603, Reel	MC0063W060313R48
Resistor, 3R48, 0.063W, 1%, 0603	MC0063W060313R48
Resistor, 3K6, 0.063W, 1%, 0603, Reel	MC0063W060313K6
Resistor, 3K6, 0.063W, 1%, 0603	MC0063W060313K6
Resistor, 3M6, 0.063W, 1%, 0603, Reel	MC0063W060313M60
Resistor, 3M6, 0.063W, 1%, 0603	MC0063W060313M60
Resistor, 3R6, 0.063W, 1%, 0603, Reel	MC0063W060313R60
Resistor, 3R6, 0.063W, 1%, 0603	MC0063W060313R60
Resistor, 3K65, 0.063W, 1%, 0603, Reel	MC0063W060313K65

Description	Part Number
Resistor, 3K65, 0.063W, 1%, 0603	MC0063W060313K65
Resistor, 3M65, 0.063W, 1%, 0603, Reel	MC0063W060313M65
Resistor, 3M65, 0.063W, 1%, 0603	MC0063W060313M65
Resistor, 3R65, 0.063W, 1%, 0603, Reel	MC0063W060313R65
Resistor, 3R65, 0.063W, 1%, 0603	MC0063W060313R65
Resistor, 3K83, 0.063W, 1%, 0603, Reel	MC0063W060313K83
Resistor, 3K83, 0.063W, 1%, 0603	MC0063W060313K83
Resistor, 3M83, 0.063W, 1%, 0603, Reel	MC0063W060313M83
Resistor, 3M83, 0.063W, 1%, 0603	MC0063W060313M83
Resistor, 3R83, 0.063W, 1%, 0603, Reel	MC0063W060313R83
Resistor, 3R83, 0.063W, 1%, 0603	MC0063W060313R83
Resistor, 3K9, 0.063W, 1%, 0603, Reel	MC0063W060313K9
Resistor, 3K9, 0.063W, 1%, 0603	MC0063W060313K9
Resistor, 3M9, 0.063W, 1%, 0603, Reel	MC0063W060313M90
Resistor, 3M9, 0.063W, 1%, 0603	MC0063W060313M90
Resistor, 3R9, 0.063W, 1%, 0603, Reel	MC0063W060313R90
Resistor, 3R9, 0.063W, 1%, 0603	MC0063W060313R90
Resistor, 30K, 0.063W, 1%, 0603, Reel	MC0063W0603130K
Resistor, 30K, 0.063W, 1%, 0603	MC0063W0603130K
Resistor, 30R, 0.063W, 1%, 0603, Reel	MC0063W0603130R
Resistor, 30R, 0.063W, 1%, 0603	MC0063W0603130R
Resistor, 30K1, 0.063W, 1%, 0603, Reel	MC0063W0603130K1
Resistor, 30K1, 0.063W, 1%, 0603	MC0063W0603130K1
Resistor, 30R1, 0.063W, 1%, 0603, Reel	MC0063W0603130R1
Resistor, 30R1, 0.063W, 1%, 0603	MC0063W0603130R1
Resistor, 300K, 0.063W, 1%, 0603, Reel	MC0063W06031300K
Resistor, 300K, 0.063W, 1%, 0603	MC0063W06031300K
Resistor, 300R, 0.063W, 1%, 0603, Reel	MC0063W06031300R
Resistor, 300R, 0.063W, 1%, 0603	MC0063W06031300R
Resistor, 301K, 0.063W, 1%, 0603, Reel	MC0063W06031301K
Resistor, 301K, 0.063W, 1%, 0603	MC0063W06031301K
Resistor, 301R, 0.063W, 1%, 0603, Reel	MC0063W06031301R
Resistor, 301R, 0.063W, 1%, 0603	MC0063W06031301R
Resistor, 31K6, 0.063W, 1%, 0603, Reel	MC0063W0603131K6
Resistor, 31K6, 0.063W, 1%, 0603	MC0063W0603131K6
Resistor, 31R6, 0.063W, 1%, 0603, Reel	MC0063W0603131R6
Resistor, 31R6, 0.063W, 1%, 0603	MC0063W0603131R6
Resistor, 316K, 0.063W, 1%, 0603, Reel	MC0063W06031316K
Resistor, 316K, 0.063W, 1%, 0603	MC0063W06031316K



# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 316R, 0.063W, 1%, 0603, Reel	MC0063W06031316R
Resistor, 316R, 0.063W, 1%, 0603	MC0063W06031316R
Resistor, 33K, 0.063W, 1%, 0603, Reel	MC0063W0603133K
Resistor, 33K, 0.063W, 1%, 0603	MC0063W0603133K
Resistor, 33R, 0.063W, 1%, 0603, Reel	MC0063W0603133R
Resistor, 33R, 0.063W, 1%, 0603	MC0063W0603133R
Resistor, 33K2, 0.063W, 1%, 0603, Reel	MC0063W0603133K2
Resistor, 33K2, 0.063W, 1%, 0603	MC0063W0603133K2
Resistor, 33R2, 0.063W, 1%, 0603, Reel	MC0063W0603133R2
Resistor, 33R2, 0.063W, 1%, 0603	MC0063W0603133R2
Resistor, 330K, 0.063W, 1%, 0603, Reel	MC0063W06031330K
Resistor, 330K, 0.063W, 1%, 0603	MC0063W06031330K
Resistor, 330R, 0.063W, 1%, 0603, Reel	MC0063W06031330R
Resistor, 330R, 0.063W, 1%, 0603	MC0063W06031330R
Resistor, 332K, 0.063W, 1%, 0603, Reel	MC0063W06031332K
Resistor, 332K, 0.063W, 1%, 0603	MC0063W06031332K
Resistor, 332R, 0.063W, 1%, 0603, Reel	MC0063W06031332R
Resistor, 332R, 0.063W, 1%, 0603	MC0063W06031332R
Resistor, 34K8, 0.063W, 1%, 0603, Reel	MC0063W0603134K8
Resistor, 34K8, 0.063W, 1%, 0603	MC0063W0603134K8
Resistor, 34R8, 0.063W, 1%, 0603, Reel	MC0063W0603134R8
Resistor, 34R8, 0.063W, 1%, 0603	MC0063W0603134R8
Resistor, 348K, 0.063W, 1%, 0603, Reel	MC0063W06031348K
Resistor, 348K, 0.063W, 1%, 0603	MC0063W06031348K
Resistor, 348R, 0.063W, 1%, 0603, Reel	MC0063W06031348R
Resistor, 348R, 0.063W, 1%, 0603	MC0063W06031348R
Resistor, 36K, 0.063W, 1%, 0603, Reel	MC0063W0603136K
Resistor, 36K, 0.063W, 1%, 0603	MC0063W0603136K
Resistor, 36R, 0.063W, 1%, 0603, Reel	MC0063W0603136R
Resistor, 36R, 0.063W, 1%, 0603	MC0063W0603136R
Resistor, 36K5, 0.063W, 1%, 0603, Reel	MC0063W0603136K5
Resistor, 36K5, 0.063W, 1%, 0603	MC0063W0603136K5
Resistor, 36R5, 0.063W, 1%, 0603, Reel	MC0063W0603136R5
Resistor, 36R5, 0.063W, 1%, 0603	MC0063W0603136R5
Resistor, 360K, 0.063W, 1%, 0603, Reel	MC0063W06031360K
Resistor, 360K, 0.063W, 1%, 0603	MC0063W06031360K
Resistor, 360R, 0.063W, 1%, 0603, Reel	MC0063W06031360R
Resistor, 360R, 0.063W, 1%, 0603	MC0063W06031360R
Resistor, 365K, 0.063W, 1%, 0603, Reel	MC0063W06031365K

Description	Part Number
Resistor, 365K, 0.063W, 1%, 0603	MC0063W06031365K
Resistor, 365R, 0.063W, 1%, 0603, Reel	MC0063W06031365R
Resistor, 365R, 0.063W, 1%, 0603	MC0063W06031365R
Resistor, 38K3, 0.063W, 1%, 0603, Reel	MC0063W0603138K3
Resistor, 38K3, 0.063W, 1%, 0603	MC0063W0603138K3
Resistor, 38R3, 0.063W, 1%, 0603, Reel	MC0063W0603138R3
Resistor, 38R3, 0.063W, 1%, 0603	MC0063W0603138R3
Resistor, 383R, 0.063W, 1%, 0603, Reel	MC0063W06031383R
Resistor, 383R, 0.063W, 1%, 0603	MC0063W06031383R
Resistor, 39K, 0.063W, 1%, 0603, Reel	MC0063W0603139K
Resistor, 39K, 0.063W, 1%, 0603	MC0063W0603139K
Resistor, 39R, 0.063W, 1%, 0603, Reel	MC0063W0603139R
Resistor, 39R, 0.063W, 1%, 0603	MC0063W0603139R
Resistor, 390K, 0.063W, 1%, 0603, Reel	MC0063W06031390K
Resistor, 390K, 0.063W, 1%, 0603	MC0063W06031390K
Resistor, 390R, 0.063W, 1%, 0603, Reel	MC0063W06031390R
Resistor, 390R, 0.063W, 1%, 0603	MC0063W06031390R
Resistor, 4K02, 0.063W, 1%, 0603, Reel	MC0063W060314K02
Resistor, 4K02, 0.063W, 1%, 0603	MC0063W060314K02
Resistor, 4M02, 0.063W, 1%, 0603, Reel	MC0063W060314M02
Resistor, 4M02, 0.063W, 1%, 0603	MC0063W060314M02
Resistor, 4K22, 0.063W, 1%, 0603, Reel	MC0063W060314K22
Resistor, 4K22, 0.063W, 1%, 0603	MC0063W060314K22
Resistor, 4R22, 0.063W, 1%, 0603, Reel	MC0063W060314R22
Resistor, 4R22, 0.063W, 1%, 0603	MC0063W060314R22
Resistor, 4K3, 0.063W, 1%, 0603, Reel	MC0063W060314K3
Resistor, 4K3, 0.063W, 1%, 0603	MC0063W060314K3
Resistor, 4M3, 0.063W, 1%, 0603, Reel	MC0063W060314M30
Resistor, 4M3, 0.063W, 1%, 0603	MC0063W060314M30
Resistor, 4R3, 0.063W, 1%, 0603, Reel	MC0063W060314R30
Resistor, 4R3, 0.063W, 1%, 0603	MC0063W060314R30
Resistor, 4K42, 0.063W, 1%, 0603, Reel	MC0063W060314K42
Resistor, 4K42, 0.063W, 1%, 0603	MC0063W060314K42
Resistor, 4M42, 0.063W, 1%, 0603, Reel	MC0063W060314M42
Resistor, 4M42, 0.063W, 1%, 0603	MC0063W060314M42
Resistor, 4R42, 0.063W, 1%, 0603, Reel	MC0063W060314R42
Resistor, 4R42, 0.063W, 1%, 0603	MC0063W060314R42
Resistor, 4K64, 0.063W, 1%, 0603, Reel	MC0063W060314K64
Resistor, 4K64, 0.063W, 1%, 0603	MC0063W060314K64

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 4M64, 0.063W, 1%, 0603, Reel	MC0063W060314M64
Resistor, 4M64, 0.063W, 1%, 0603	MC0063W060314M64
Resistor, 4R64, 0.063W, 1%, 0603, Reel	MC0063W060314R64
Resistor, 4R64, 0.063W, 1%, 0603	MC0063W060314R64
Resistor, 4K7, 0.063W, 1%, 0603, Reel	MC0063W060314K7
Resistor, 4K7, 0.063W, 1%, 0603	MC0063W060314K7
Resistor, 4M7, 0.063W, 1%, 0603, Reel	MC0063W060314M70
Resistor, 4M7, 0.063W, 1%, 0603	MC0063W060314M70
Resistor, 4R7, 0.063W, 1%, 0603, Reel	MC0063W060314R7
Resistor, 4R7, 0.063W, 1%, 0603	MC0063W060314R7
Resistor, 4K75, 0.063W, 1%, 0603, Reel	MC0063W060314K75
Resistor, 4K75, 0.063W, 1%, 0603	MC0063W060314K75
Resistor, 4K87, 0.063W, 1%, 0603, Reel	MC0063W060314K87
Resistor, 4K87, 0.063W, 1%, 0603	MC0063W060314K87
Resistor, 4R87, 0.063W, 1%, 0603, Reel	MC0063W060314R87
Resistor, 4R87, 0.063W, 1%, 0603	MC0063W060314R87
Resistor, 4K99, 0.063W, 1%, 0603, Reel	MC0063W060314K99
Resistor, 4K99, 0.063W, 1%, 0603	MC0063W060314K99
Resistor, 40K2, 0.063W, 1%, 0603, Reel	MC0063W0603140K2
Resistor, 40K2, 0.063W, 1%, 0603	MC0063W0603140K2
Resistor, 40R2, 0.063W, 1%, 0603, Reel	MC0063W0603140R2
Resistor, 40R2, 0.063W, 1%, 0603	MC0063W0603140R2
Resistor, 402K, 0.063W, 1%, 0603, Reel	MC0063W06031402K
Resistor, 402K, 0.063W, 1%, 0603	MC0063W06031402K
Resistor, 402R, 0.063W, 1%, 0603, Reel	MC0063W06031402R
Resistor, 402R, 0.063W, 1%, 0603	MC0063W06031402R
Resistor, 42K2, 0.063W, 1%, 0603, Reel	MC0063W0603142K2
Resistor, 42K2, 0.063W, 1%, 0603	MC0063W0603142K2
Resistor, 42R2, 0.063W, 1%, 0603, Reel	MC0063W0603142R2
Resistor, 42R2, 0.063W, 1%, 0603	MC0063W0603142R2
Resistor, 422K, 0.063W, 1%, 0603, Reel	MC0063W06031422K
Resistor, 422K, 0.063W, 1%, 0603	MC0063W06031422K
Resistor, 422R, 0.063W, 1%, 0603, Reel	MC0063W06031422R
Resistor, 422R, 0.063W, 1%, 0603	MC0063W06031422R
Resistor, 43K, 0.063W, 1%, 0603, Reel	MC0063W0603143K
Resistor, 43K, 0.063W, 1%, 0603	MC0063W0603143K
Resistor, 43R, 0.063W, 1%, 0603, Reel	MC0063W0603143R
Resistor, 43R, 0.063W, 1%, 0603	MC0063W0603143R
Resistor, 430K, 0.063W, 1%, 0603, Reel	MC0063W06031430K

Description	Part Number
Resistor, 430K, 0.063W, 1%, 0603	MC0063W06031430K
Resistor, 430R, 0.063W, 1%, 0603, Reel	MC0063W06031430R
Resistor, 430R, 0.063W, 1%, 0603	MC0063W06031430R
Resistor, 44K2, 0.063W, 1%, 0603, Reel	MC0063W0603144K2
Resistor, 44K2, 0.063W, 1%, 0603	MC0063W0603144K2
Resistor, 44R2, 0.063W, 1%, 0603, Reel	MC0063W0603144R2
Resistor, 44R2, 0.063W, 1%, 0603	MC0063W0603144R2
Resistor, 442K, 0.063W, 1%, 0603, Reel	MC0063W06031442K
Resistor, 442K, 0.063W, 1%, 0603	MC0063W06031442K
Resistor, 442R, 0.063W, 1%, 0603, Reel	MC0063W06031442R
Resistor, 442R, 0.063W, 1%, 0603	MC0063W06031442R
Resistor, 46K4, 0.063W, 1%, 0603, Reel	MC0063W0603146K4
Resistor, 46K4, 0.063W, 1%, 0603	MC0063W0603146K4
Resistor, 46R4, 0.063W, 1%, 0603, Reel	MC0063W0603146R4
Resistor, 46R4, 0.063W, 1%, 0603	MC0063W0603146R4
Resistor, 464K, 0.063W, 1%, 0603, Reel	MC0063W06031464K
Resistor, 464K, 0.063W, 1%, 0603	MC0063W06031464K
Resistor, 464R, 0.063W, 1%, 0603, Reel	MC0063W06031464R
Resistor, 464R, 0.063W, 1%, 0603	MC0063W06031464R
Resistor, 47K, 0.063W, 1%, 0603, Reel	MC0063W0603147K
Resistor, 47K, 0.063W, 1%, 0603	MC0063W0603147K
Resistor, 47R, 0.063W, 1%, 0603, Reel	MC0063W0603147R
Resistor, 47R, 0.063W, 1%, 0603	MC0063W0603147R
Resistor, 47K5, 0.063W, 1%, 0603, Reel	MC0063W0603147K5
Resistor, 47K5, 0.063W, 1%, 0603	MC0063W0603147K5
Resistor, 470K, 0.063W, 1%, 0603, Reel	MC0063W06031470K
Resistor, 470K, 0.063W, 1%, 0603	MC0063W06031470K
Resistor, 470R, 0.063W, 1%, 0603, Reel	MC0063W06031470R
Resistor, 470R, 0.063W, 1%, 0603	MC0063W06031470R
Resistor, 475R, 0.063W, 1%, 0603, Reel	MC0063W06031475R
Resistor, 475R, 0.063W, 1%, 0603	MC0063W06031475R
Resistor, 48K7, 0.063W, 1%, 0603, Reel	MC0063W0603148K7
Resistor, 48K7, 0.063W, 1%, 0603	MC0063W0603148K7
Resistor, 48R7, 0.063W, 1%, 0603, Reel	MC0063W0603148R7
Resistor, 48R7, 0.063W, 1%, 0603	MC0063W0603148R7
Resistor, 487K, 0.063W, 1%, 0603, Reel	MC0063W06031487K
Resistor, 487K, 0.063W, 1%, 0603	MC0063W06031487K
Resistor, 487R, 0.063W, 1%, 0603, Reel	MC0063W06031487R
Resistor, 487R, 0.063W, 1%, 0603	MC0063W06031487R

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 49K9, 0.063W, 1%, 0603, Reel	MC0063W0603149K9
Resistor, 49K9, 0.063W, 1%, 0603	MC0063W0603149K9
Resistor, 49R9, 0.063W, 1%, 0603, Reel	MC0063W0603149R9
Resistor, 49R9, 0.063W, 1%, 0603	MC0063W0603149R9
Resistor, 499K, 0.063W, 1%, 0603, Reel	MC0063W06031499K
Resistor, 499K, 0.063W, 1%, 0603	MC0063W06031499K
Resistor, 5K1, 0.063W, 1%, 0603, Reel	MC0063W060315K1
Resistor, 5K1, 0.063W, 1%, 0603	MC0063W060315K1
Resistor, 5M1, 0.063W, 1%, 0603, Reel	MC0063W060315M10
Resistor, 5M1, 0.063W, 1%, 0603	MC0063W060315M10
Resistor, 5R1, 0.063W, 1%, 0603, Reel	MC0063W060315R10
Resistor, 5R1, 0.063W, 1%, 0603	MC0063W060315R10
Resistor, 5K11, 0.063W, 1%, 0603, Reel	MC0063W060315K11
Resistor, 5K11, 0.063W, 1%, 0603	MC0063W060315K11
Resistor, 5M11, 0.063W, 1%, 0603, Reel	MC0063W060315M11
Resistor, 5M11, 0.063W, 1%, 0603	MC0063W060315M11
Resistor, 5R11, 0.063W, 1%, 0603, Reel	MC0063W060315R11
Resistor, 5R11, 0.063W, 1%, 0603	MC0063W060315R11
Resistor, 5K36, 0.063W, 1%, 0603, Reel	MC0063W060315K36
Resistor, 5K36, 0.063W, 1%, 0603	MC0063W060315K36
Resistor, 5K6, 0.063W, 1%, 0603, Reel	MC0063W060315K6
Resistor, 5K6, 0.063W, 1%, 0603	MC0063W060315K6
Resistor, 5M6, 0.063W, 1%, 0603, Reel	MC0063W060315M60
Resistor, 5M6, 0.063W, 1%, 0603	MC0063W060315M60
Resistor, 5R6, 0.063W, 1%, 0603, Reel	MC0063W060315R60
Resistor, 5R6, 0.063W, 1%, 0603	MC0063W060315R60
Resistor, 5K62, 0.063W, 1%, 0603, Reel	MC0063W060315K62
Resistor, 5K62, 0.063W, 1%, 0603	MC0063W060315K62
Resistor, 5M62, 0.063W, 1%, 0603, Reel	MC0063W060315M62
Resistor, 5M62, 0.063W, 1%, 0603	MC0063W060315M62
Resistor, 5R62, 0.063W, 1%, 0603, Reel	MC0063W060315R62
Resistor, 5R62, 0.063W, 1%, 0603	MC0063W060315R62
Resistor, 5K9, 0.063W, 1%, 0603, Reel	MC0063W060315K9
Resistor, 5K9, 0.063W, 1%, 0603	MC0063W060315K9
Resistor, 5M9, 0.063W, 1%, 0603, Reel	MC0063W060315M90
Resistor, 5M9, 0.063W, 1%, 0603	MC0063W060315M90
Resistor, 5R9, 0.063W, 1%, 0603, Reel	MC0063W060315R90
Resistor, 5R9, 0.063W, 1%, 0603	MC0063W060315R90
Resistor, 51K, 0.063W, 1%, 0603, Reel	MC0063W0603151K

Description	Part Number
Resistor, 51K, 0.063W, 1%, 0603	MC0063W0603151K
Resistor, 51R, 0.063W, 1%, 0603, Reel	MC0063W0603151R
Resistor, 51R, 0.063W, 1%, 0603	MC0063W0603151R
Resistor, 51K1, 0.063W, 1%, 0603, Reel	MC0063W0603151K1
Resistor, 51K1, 0.063W, 1%, 0603	MC0063W0603151K1
Resistor, 51R1, 0.063W, 1%, 0603, Reel	MC0063W0603151R1
Resistor, 51R1, 0.063W, 1%, 0603	MC0063W0603151R1
Resistor, 510K, 0.063W, 1%, 0603, Reel	MC0063W06031510K
Resistor, 510K, 0.063W, 1%, 0603	MC0063W06031510K
Resistor, 510R, 0.063W, 1%, 0603, Reel	MC0063W06031510R
Resistor, 510R, 0.063W, 1%, 0603	MC0063W06031510R
Resistor, 511K, 0.063W, 1%, 0603, Reel	MC0063W06031511K
Resistor, 511K, 0.063W, 1%, 0603	MC0063W06031511K
Resistor, 511R, 0.063W, 1%, 0603, Reel	MC0063W06031511R
Resistor, 511R, 0.063W, 1%, 0603	MC0063W06031511R
Resistor, 53K6, 0.063W, 1%, 0603, Reel	MC0063W0603153K6
Resistor, 53K6, 0.063W, 1%, 0603	MC0063W0603153K6
Resistor, 53R6, 0.063W, 1%, 0603, Reel	MC0063W0603153R6
Resistor, 53R6, 0.063W, 1%, 0603	MC0063W0603153R6
Resistor, 536K, 0.063W, 1%, 0603, Reel	MC0063W06031536K
Resistor, 536K, 0.063W, 1%, 0603	MC0063W06031536K
Resistor, 536R, 0.063W, 1%, 0603, Reel	MC0063W06031536R
Resistor, 536R, 0.063W, 1%, 0603	MC0063W06031536R
Resistor, 56K, 0.063W, 1%, 0603, Reel	MC0063W0603156K
Resistor, 56K, 0.063W, 1%, 0603	MC0063W0603156K
Resistor, 56R, 0.063W, 1%, 0603, Reel	MC0063W0603156R
Resistor, 56R, 0.063W, 1%, 0603	MC0063W0603156R
Resistor, 56K2, 0.063W, 1%, 0603, Reel	MC0063W0603156K2
Resistor, 56K2, 0.063W, 1%, 0603	MC0063W0603156K2
Resistor, 56R2, 0.063W, 1%, 0603, Reel	MC0063W0603156R2
Resistor, 56R2, 0.063W, 1%, 0603	MC0063W0603156R2
Resistor, 560K, 0.063W, 1%, 0603, Reel	MC0063W06031560K
Resistor, 560K, 0.063W, 1%, 0603	MC0063W06031560K
Resistor, 560R, 0.063W, 1%, 0603, Reel	MC0063W06031560R
Resistor, 560R, 0.063W, 1%, 0603	MC0063W06031560R
Resistor, 562K, 0.063W, 1%, 0603, Reel	MC0063W06031562K
Resistor, 562K, 0.063W, 1%, 0603	MC0063W06031562K
Resistor, 562R, 0.063W, 1%, 0603, Reel	MC0063W06031562R
Resistor, 562R, 0.063W, 1%, 0603	MC0063W06031562R

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 59K, 0.063W, 1%, 0603, Reel	MC0063W0603159K
Resistor, 59K, 0.063W, 1%, 0603	MC0063W0603159K
Resistor, 59R, 0.063W, 1%, 0603, Reel	MC0063W0603159R
Resistor, 59R, 0.063W, 1%, 0603	MC0063W0603159R
Resistor, 590K, 0.063W, 1%, 0603, Reel	MC0063W06031590K
Resistor, 590K, 0.063W, 1%, 0603	MC0063W06031590K
Resistor, 590R, 0.063W, 1%, 0603, Reel	MC0063W06031590R
Resistor, 590R, 0.063W, 1%, 0603	MC0063W06031590R
Resistor, 6K04, 0.063W, 1%, 0603, Reel	MC0063W060316K04
Resistor, 6K04, 0.063W, 1%, 0603	MC0063W060316K04
Resistor, 6K19, 0.063W, 1%, 0603, Reel	MC0063W060316K19
Resistor, 6K19, 0.063W, 1%, 0603	MC0063W060316K19
Resistor, 6R19, 0.063W, 1%, 0603, Reel	MC0063W060316R19
Resistor, 6R19, 0.063W, 1%, 0603	MC0063W060316R19
Resistor, 6K2, 0.063W, 1%, 0603, Reel	MC0063W060316K2
Resistor, 6K2, 0.063W, 1%, 0603	MC0063W060316K2
Resistor, 6M2, 0.063W, 1%, 0603, Reel	MC0063W060316M20
Resistor, 6M2, 0.063W, 1%, 0603	MC0063W060316M20
Resistor, 6R2, 0.063W, 1%, 0603, Reel	MC0063W060316R20
Resistor, 6R2, 0.063W, 1%, 0603	MC0063W060316R20
Resistor, 6K49, 0.063W, 1%, 0603, Reel	MC0063W060316K49
Resistor, 6K49, 0.063W, 1%, 0603	MC0063W060316K49
Resistor, 6M49, 0.063W, 1%, 0603, Reel	MC0063W060316M49
Resistor, 6M49, 0.063W, 1%, 0603	MC0063W060316M49
Resistor, 6R49, 0.063W, 1%, 0603, Reel	MC0063W060316R49
Resistor, 6R49, 0.063W, 1%, 0603	MC0063W060316R49
Resistor, 6K8, 0.063W, 1%, 0603, Reel	MC0063W060316K8
Resistor, 6K8, 0.063W, 1%, 0603	MC0063W060316K8
Resistor, 6M8, 0.063W, 1%, 0603, Reel	MC0063W060316M80
Resistor, 6M8, 0.063W, 1%, 0603	MC0063W060316M80
Resistor, 6R8, 0.063W, 1%, 0603, Reel	MC0063W060316R8
Resistor, 6R8, 0.063W, 1%, 0603	MC0063W060316R8
Resistor, 6K81, 0.063W, 1%, 0603, Reel	MC0063W060316K81
Resistor, 6K81, 0.063W, 1%, 0603	MC0063W060316K81
Resistor, 6R81, 0.063W, 1%, 0603, Reel	MC0063W060316R81
Resistor, 6R81, 0.063W, 1%, 0603	MC0063W060316R81
Resistor, 61K9, 0.063W, 1%, 0603, Reel	MC0063W0603161K9
Resistor, 61K9, 0.063W, 1%, 0603	MC0063W0603161K9
Resistor, 61R9, 0.063W, 1%, 0603, Reel	MC0063W0603161R9

Description	Part Number
Resistor, 61R9, 0.063W, 1%, 0603	MC0063W0603161R9
Resistor, 619K, 0.063W, 1%, 0603, Reel	MC0063W06031619K
Resistor, 619K, 0.063W, 1%, 0603	MC0063W06031619K
Resistor, 619R, 0.063W, 1%, 0603, Reel	MC0063W06031619R
Resistor, 619R, 0.063W, 1%, 0603	MC0063W06031619R
Resistor, 62K, 0.063W, 1%, 0603, Reel	MC0063W0603162K
Resistor, 62K, 0.063W, 1%, 0603	MC0063W0603162K
Resistor, 62R, 0.063W, 1%, 0603, Reel	MC0063W0603162R
Resistor, 62R, 0.063W, 1%, 0603	MC0063W0603162R
Resistor, 620K, 0.063W, 1%, 0603, Reel	MC0063W06031620K
Resistor, 620K, 0.063W, 1%, 0603	MC0063W06031620K
Resistor, 620R, 0.063W, 1%, 0603, Reel	MC0063W06031620R
Resistor, 620R, 0.063W, 1%, 0603	MC0063W06031620R
Resistor, 64K9, 0.063W, 1%, 0603, Reel	MC0063W0603164K9
Resistor, 64K9, 0.063W, 1%, 0603	MC0063W0603164K9
Resistor, 64R9, 0.063W, 1%, 0603, Reel	MC0063W0603164R9
Resistor, 64R9, 0.063W, 1%, 0603	MC0063W0603164R9
Resistor, 649K, 0.063W, 1%, 0603, Reel	MC0063W06031649K
Resistor, 649K, 0.063W, 1%, 0603	MC0063W06031649K
Resistor, 649R, 0.063W, 1%, 0603, Reel	MC0063W06031649R
Resistor, 649R, 0.063W, 1%, 0603	MC0063W06031649R
Resistor, 68K, 0.063W, 1%, 0603, Reel	MC0063W0603168K
Resistor, 68K, 0.063W, 1%, 0603	MC0063W0603168K
Resistor, 68R, 0.063W, 1%, 0603, Reel	MC0063W0603168R
Resistor, 68R, 0.063W, 1%, 0603	MC0063W0603168R
Resistor, 68K1, 0.063W, 1%, 0603, Reel	MC0063W0603168K1
Resistor, 68K1, 0.063W, 1%, 0603	MC0063W0603168K1
Resistor, 68R1, 0.063W, 1%, 0603, Reel	MC0063W0603168R1
Resistor, 68R1, 0.063W, 1%, 0603	MC0063W0603168R1
Resistor, 680K, 0.063W, 1%, 0603, Reel	MC0063W06031680K
Resistor, 680K, 0.063W, 1%, 0603	MC0063W06031680K
Resistor, 680R, 0.063W, 1%, 0603, Reel	MC0063W06031680R
Resistor, 680R, 0.063W, 1%, 0603	MC0063W06031680R
Resistor, 681K, 0.063W, 1%, 0603, Reel	MC0063W06031681K
Resistor, 681K, 0.063W, 1%, 0603	MC0063W06031681K
Resistor, 681R, 0.063W, 1%, 0603, Reel	MC0063W06031681R
Resistor, 681R, 0.063W, 1%, 0603	MC0063W06031681R
Resistor, 7K15, 0.063W, 1%, 0603, Reel	MC0063W060317K15
Resistor, 7K15, 0.063W, 1%, 0603	MC0063W060317K15

# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 7R15, 0.063W, 1%, 0603, Reel	MC0063W060317R15
Resistor, 7R15, 0.063W, 1%, 0603	MC0063W060317R15
Resistor, 7K5, 0.063W, 1%, 0603, Reel	MC0063W060317K5
Resistor, 7K5, 0.063W, 1%, 0603	MC0063W060317K5
Resistor, 7M5, 0.063W, 1%, 0603, Reel	MC0063W060317M50
Resistor, 7M5, 0.063W, 1%, 0603	MC0063W060317M50
Resistor, 7R5, 0.063W, 1%, 0603, Reel	MC0063W060317R50
Resistor, 7R5, 0.063W, 1%, 0603	MC0063W060317R50
Resistor, 7K87, 0.063W, 1%, 0603, Reel	MC0063W060317K87
Resistor, 7K87, 0.063W, 1%, 0603	MC0063W060317K87
Resistor, 7R87, 0.063W, 1%, 0603, Reel	MC0063W060317R87
Resistor, 7R87, 0.063W, 1%, 0603	MC0063W060317R87
Resistor, 71K5, 0.063W, 1%, 0603, Reel	MC0063W0603171K5
Resistor, 71K5, 0.063W, 1%, 0603	MC0063W0603171K5
Resistor, 71R5, 0.063W, 1%, 0603, Reel	MC0063W0603171R5
Resistor, 71R5, 0.063W, 1%, 0603	MC0063W0603171R5
Resistor, 715K, 0.063W, 1%, 0603, Reel	MC0063W06031715K
Resistor, 715K, 0.063W, 1%, 0603	MC0063W06031715K
Resistor, 715R, 0.063W, 1%, 0603, Reel	MC0063W06031715R
Resistor, 715R, 0.063W, 1%, 0603	MC0063W06031715R
Resistor, 75K, 0.063W, 1%, 0603, Reel	MC0063W0603175K
Resistor, 75K, 0.063W, 1%, 0603	MC0063W0603175K
Resistor, 75R, 0.063W, 1%, 0603, Reel	MC0063W0603175R
Resistor, 75R, 0.063W, 1%, 0603	MC0063W0603175R
Resistor, 750K, 0.063W, 1%, 0603, Reel	MC0063W06031750K
Resistor, 750K, 0.063W, 1%, 0603	MC0063W06031750K
Resistor, 750R, 0.063W, 1%, 0603, Reel	MC0063W06031750R
Resistor, 750R, 0.063W, 1%, 0603	MC0063W06031750R
Resistor, 78K7, 0.063W, 1%, 0603, Reel	MC0063W0603178K7
Resistor, 78K7, 0.063W, 1%, 0603	MC0063W0603178K7
Resistor, 78R7, 0.063W, 1%, 0603, Reel	MC0063W0603178R7
Resistor, 78R7, 0.063W, 1%, 0603	MC0063W0603178R7
Resistor, 787K, 0.063W, 1%, 0603, Reel	MC0063W06031787K
Resistor, 787K, 0.063W, 1%, 0603	MC0063W06031787K
Resistor, 787R, 0.063W, 1%, 0603, Reel	MC0063W06031787R
Resistor, 787R, 0.063W, 1%, 0603	MC0063W06031787R
Resistor, 8K2, 0.063W, 1%, 0603, Reel	MC0063W060318K2
Resistor, 8K2, 0.063W, 1%, 0603	MC0063W060318K2
Resistor, 8M2, 0.063W, 1%, 0603, Reel	MC0063W060318M20

Description	Part Number
Resistor, 8M2, 0.063W, 1%, 0603	MC0063W060318M20
Resistor, 8R2, 0.063W, 1%, 0603, Reel	MC0063W060318R20
Resistor, 8R2, 0.063W, 1%, 0603	MC0063W060318R20
Resistor, 8K25, 0.063W, 1%, 0603, Reel	MC0063W060318K25
Resistor, 8K25, 0.063W, 1%, 0603	MC0063W060318K25
Resistor, 8R25, 0.063W, 1%, 0603, Reel	MC0063W060318R25
Resistor, 8R25, 0.063W, 1%, 0603	MC0063W060318R25
Resistor, 8K66, 0.063W, 1%, 0603, Reel	MC0063W060318K66
Resistor, 8K66, 0.063W, 1%, 0603	MC0063W060318K66
Resistor, 8R66, 0.063W, 1%, 0603, Reel	MC0063W060318R66
Resistor, 8R66, 0.063W, 1%, 0603	MC0063W060318R66
Resistor, 82K, 0.063W, 1%, 0603, Reel	MC0063W0603182K
Resistor, 82K, 0.063W, 1%, 0603	MC0063W0603182K
Resistor, 82R, 0.063W, 1%, 0603, Reel	MC0063W0603182R
Resistor, 82R, 0.063W, 1%, 0603	MC0063W0603182R
Resistor, 82K5, 0.063W, 1%, 0603, Reel	MC0063W0603182K5
Resistor, 82K5, 0.063W, 1%, 0603	MC0063W0603182K5
Resistor, 82R5, 0.063W, 1%, 0603, Reel	MC0063W0603182R5
Resistor, 82R5, 0.063W, 1%, 0603	MC0063W0603182R5
Resistor, 820K, 0.063W, 1%, 0603, Reel	MC0063W06031820K
Resistor, 820K, 0.063W, 1%, 0603	MC0063W06031820K
Resistor, 820R, 0.063W, 1%, 0603, Reel	MC0063W06031820R
Resistor, 820R, 0.063W, 1%, 0603	MC0063W06031820R
Resistor, 825K, 0.063W, 1%, 0603, Reel	MC0063W06031825K
Resistor, 825K, 0.063W, 1%, 0603	MC0063W06031825K
Resistor, 825R, 0.063W, 1%, 0603, Reel	MC0063W06031825R
Resistor, 825R, 0.063W, 1%, 0603	MC0063W06031825R
Resistor, 86K6, 0.063W, 1%, 0603, Reel	MC0063W0603186K6
Resistor, 86K6, 0.063W, 1%, 0603	MC0063W0603186K6
Resistor, 86R6, 0.063W, 1%, 0603, Reel	MC0063W0603186R6
Resistor, 86R6, 0.063W, 1%, 0603	MC0063W0603186R6
Resistor, 866K, 0.063W, 1%, 0603, Reel	MC0063W06031866K
Resistor, 866K, 0.063W, 1%, 0603	MC0063W06031866K
Resistor, 866R, 0.063W, 1%, 0603, Reel	MC0063W06031866R
Resistor, 866R, 0.063W, 1%, 0603	MC0063W06031866R
Resistor, 9K09, 0.063W, 1%, 0603, Reel	MC0063W060319K09
Resistor, 9K09, 0.063W, 1%, 0603	MC0063W060319K09
Resistor, 9K1, 0.063W, 1%, 0603, Reel	MC0063W060319K1
Resistor, 9K1, 0.063W, 1%, 0603	MC0063W060319K1



# Thick Film Chip Resistor 0603



Description	Part Number
Resistor, 9M1, 0.063W, 1%, 0603, Reel	MC0063W060319M10
Resistor, 9M1, 0.063W, 1%, 0603	MC0063W060319M10
Resistor, 9R1, 0.063W, 1%, 0603, Reel	MC0063W060319R10
Resistor, 9R1, 0.063W, 1%, 0603	MC0063W060319R10
Resistor, 9K53, 0.063W, 1%, 0603, Reel	MC0063W060319K53
Resistor, 9K53, 0.063W, 1%, 0603	MC0063W060319K53
Resistor, 9M53, 0.063W, 1%, 0603, Reel	MC0063W060319M53
Resistor, 9M53, 0.063W, 1%, 0603	MC0063W060319M53
Resistor, 9R53, 0.063W, 1%, 0603, Reel	MC0063W060319R53
Resistor, 9R53, 0.063W, 1%, 0603	MC0063W060319R53
Resistor, 90K9, 0.063W, 1%, 0603, Reel	MC0063W0603190K9
Resistor, 90K9, 0.063W, 1%, 0603	MC0063W0603190K9
Resistor, 90R9, 0.063W, 1%, 0603, Reel	MC0063W0603190R9
Resistor, 90R9, 0.063W, 1%, 0603	MC0063W0603190R9
Resistor, 909K, 0.063W, 1%, 0603, Reel	MC0063W06031909K
Resistor, 909K, 0.063W, 1%, 0603	MC0063W06031909K
Resistor, 909R, 0.063W, 1%, 0603, Reel	MC0063W06031909R

Description	Part Number
Resistor, 909R, 0.063W, 1%, 0603	MC0063W06031909R
Resistor, 91K, 0.063W, 1%, 0603, Reel	MC0063W0603191K
Resistor, 91K, 0.063W, 1%, 0603	MC0063W0603191K
Resistor, 91R, 0.063W, 1%, 0603, Reel	MC0063W0603191R
Resistor, 91R, 0.063W, 1%, 0603	MC0063W0603191R
Resistor, 910K, 0.063W, 1%, 0603, Reel	MC0063W06031910K
Resistor, 910K, 0.063W, 1%, 0603	MC0063W06031910K
Resistor, 910R, 0.063W, 1%, 0603, Reel	MC0063W06031910R
Resistor, 910R, 0.063W, 1%, 0603	MC0063W06031910R
Resistor, 95K3, 0.063W, 1%, 0603, Reel	MC0063W0603195K3
Resistor, 95K3, 0.063W, 1%, 0603	MC0063W0603195K3
Resistor, 95R3, 0.063W, 1%, 0603, Reel	MC0063W0603195R3
Resistor, 95R3, 0.063W, 1%, 0603	MC0063W0603195R3
Resistor, 953K, 0.063W, 1%, 0603, Reel	MC0063W06031953K
Resistor, 953K, 0.063W, 1%, 0603	MC0063W06031953K
Resistor, 953R, 0.063W, 1%, 0603, Reel	MC0063W06031953R
Resistor, 953R, 0.063W, 1%, 0603	MC0063W06031953R

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com  
www.farnell.com  
www.newark.com

