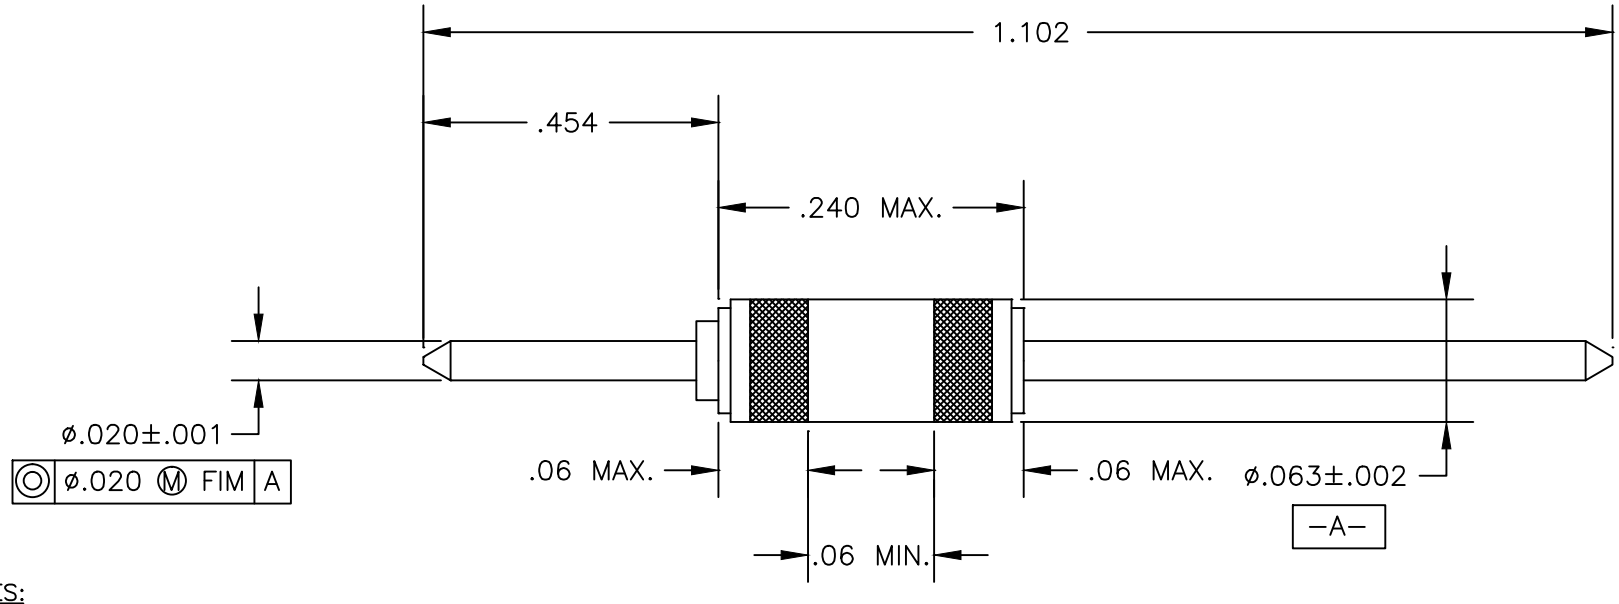

NOTES:

1) WORKING VOLTAGE: 50 VDC.
2) LEAD MATERIAL: PHOS. BRONZE.
3) SOLDER MELTING TEMPERATURE: +430°F.
4) CURRENT: 3 AMPS MAX.
5) PLATING FINISH: SILVER
6) LEAD FINISH: GOLD
7) BAND COLOR: GREEN

STEP 0100	94-4033-00	VISUAL/MECH.	PASS	FAIL
PER IT 38-0247 SAMPLE SIZE: COMMENTS:		OPER:		
INSPECT DIMENSIONS AND WORKMANSHIP.				
STEP 0200	94-1002-00	CAP./D.F.	PASS	FAIL
PER IT 38-0245 SAMPLE SIZE: COMMENTS:		OPER:		
D.F. 4% MAX. CAP: 4000pf TO 8000pf				
STEP 0300	94-2015-00	I.R.	PASS	FAIL
PER IT 38-0245 SAMPLE SIZE: COMMENTS:		OPER:		
I.R.: 125 VDC, 5 KMohm MIN.				

REV. NO.	CHANGE NOTICE
2	CN 199044
1	CN 177911
0	CN 169750

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

DO NOT SCALE.

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx± .02
Dec. .xxx± .005
Angles ±0° 30'

CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW PENNSYLVANIA

Dwn. KEVERLINE
Ckd. 12-5-95
Apvd.
Sheet 1 of 1

Description SUBASSEMBLY 4000pF - 8000pF

71-0059-0371

Quality Products From The Specialists In Electro-Magnetic Compatibility