


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute


MATERIAL

Terminal: Brass
 Material: Nylon 66,UL94V-0

ORDER INFORMATION

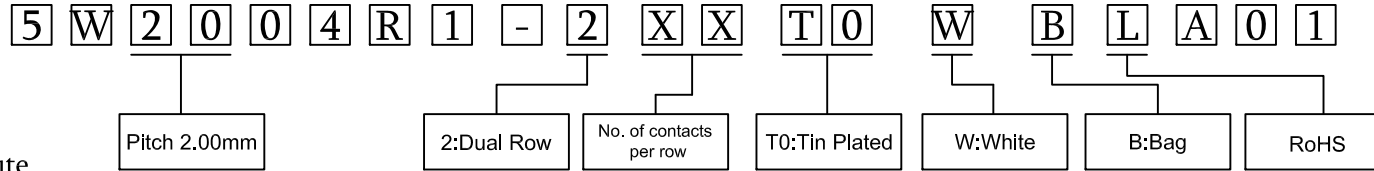

Circuit No.	Dimensions				
	A	B	C	D	E
2X02	2.00	6.00	4.70	---	1.50
2X03	4.00	8.00	6.70	---	3.00
2X04	6.00	10.00	8.70	---	4.00
2X05	8.00	12.00	10.70	6.00	4.00
2X06	10.00	14.00	12.70	8.00	4.00
2X07	12.00	16.00	14.70	10.00	5.00
2X08	14.00	18.00	16.70	12.00	5.00
2X09	16.00	20.00	18.70	14.00	5.00
2X10	18.00	22.00	20.70	16.00	5.00
2X11	20.00	24.00	22.70	18.00	5.00
2X12	22.00	26.00	24.70	20.00	5.00
2X13	24.00	28.00	26.70	22.00	5.00
2X14	26.00	30.00	28.70	24.00	5.00
2X15	28.00	32.00	30.70	26.00	5.00
2X16	30.00	34.00	32.70	28.00	5.00
2X17	32.00	36.00	34.70	30.00	5.00
2X18	34.00	38.00	36.70	32.00	5.00
2X19	36.00	40.00	38.70	34.00	5.00
2X20	38.00	42.00	40.70	36.00	5.00
2X21	40.00	44.00	42.70	38.00	5.00
2X22	42.00	46.00	44.70	40.00	5.00

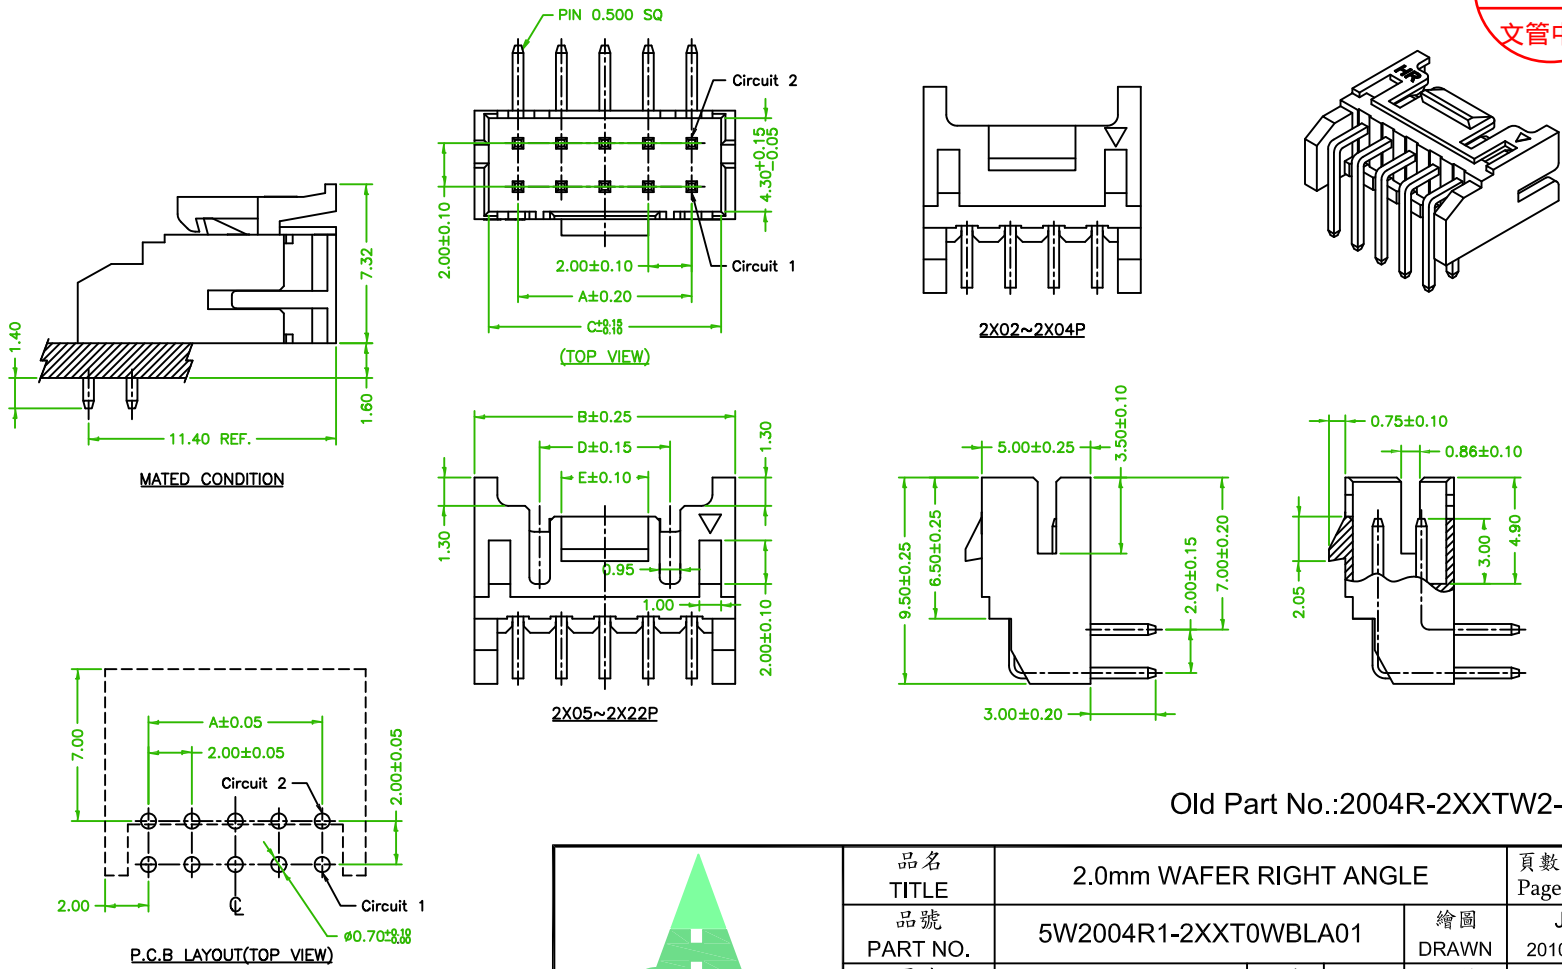

Old Part No.:2004R-2XXTW2-L

REV.	Revised the Drawing	B	2017/01/16 Jeff
	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek
 糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	2.0mm WAFER RIGHT ANGLE			頁數 Page	1/1
品號 PART NO.	5W2004R1-2XXT0WBLA01		繪圖 DRAWN	Joe	
圖號 DRAWING NO.	GW090-EL027	版本 REV.	B	核對 CHECKED	Paul
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	