


VHF TUNER BAND SWITCH APPLICATIONS.

**FEATURES :**

- Small Package
- Small Total Capacitance :  $C_T=1.2\text{pF (Max.)}$
- Low Series Resistance :  $r_s=0.6\Omega \text{ (Typ.)}$

**MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	$V_R$	30	V
Forward Current	$I_F$	100	mA
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55~125	$^\circ\text{C}$

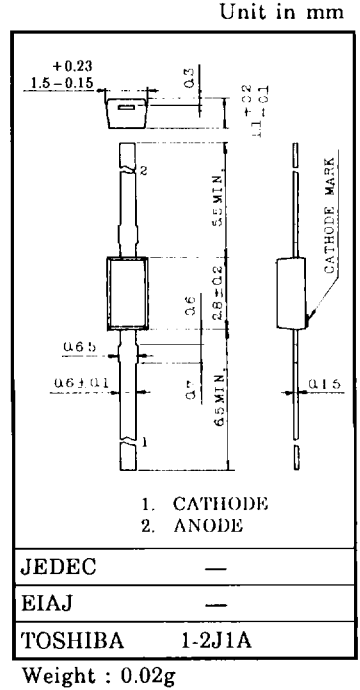

**ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	$V_F$	$I_F=2\text{mA}$	—	—	0.85	V
Reverse Current	$I_R$	$V_R=15\text{V}$	—	—	0.1	$\mu\text{A}$
Reverse Voltage	$V_R$	$V_R=1\mu\text{A}$	30	—	—	V
Total Capacitance	$C_T$	$V_R=6\text{V}, f=1\text{MHz}$	—	0.8	1.2	pF
Series Resistance	$r_s$	$I_F=2\text{mA}, f=100\text{MHz}$	—	0.6	0.9	$\Omega$

**Marking**

